



WE LOVE LIFE,
WE PROTECT IT.



BYCN Power Tools Reference




This catalog is the unique BYCN reference for all portable power tools. It meets the group's requirements and specifications.

Ordering of portable power tools will only be made from authorized power tool suppliers via the catalog items set up in Pablo.

The COPIL Electroportatif BYCN guarantees this referencing and its updates, according to technical developments and identified requests or needs.

Disclaimer: All information provided in this catalog is for internal guidance purposes only. The only valid technical information is that found on the manufacturer's official website or in the manufacturer's official documentation.

• Risques Majeurs BYCN

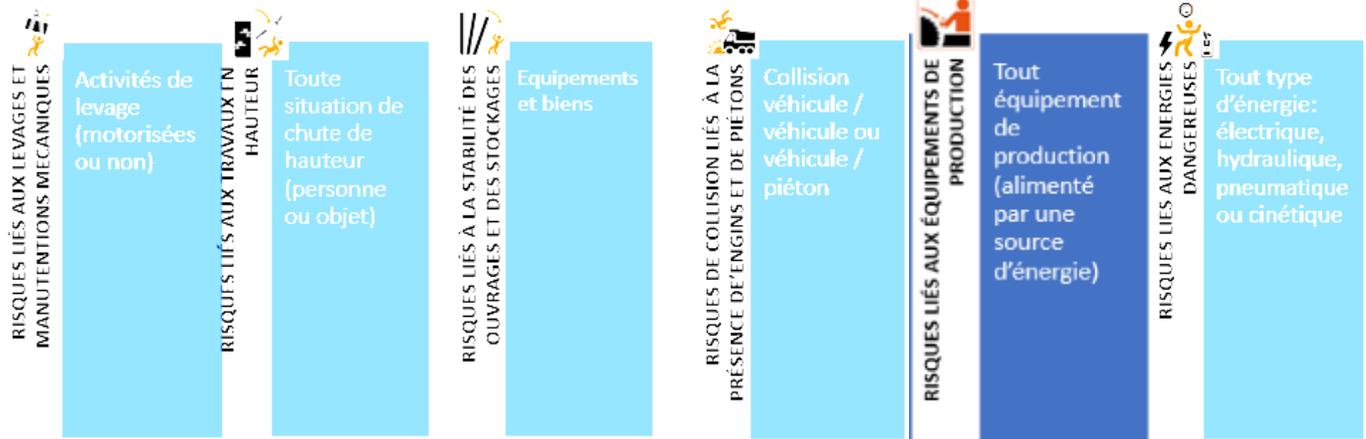

12
FONDAMENTAUX
 SANTÉ & SÉCURITÉ



Summary

Introduction	3
Generic requirements.....	4
The logos.....	5

Power tools

Batteries, Accessories.....	6-9
Surface, sand, polish	12-25
Stitch, chisel	26-34
Punch	35-46
Drill, screw, bolt	47-71
Core	72-78
Cutting the wood.....	79-95
Machining wood.....	96-106
Grind, cut, machine metal.....	107-132
Cutting materials.....	133 -166
Nail, ligate, strap.....	167 -178
Crimping and cutting cables	179-189
Strive.....	190-199
Links to choice help sites.....	200

Generic requirements

Conformity : CE conformity and/or standards in force

Noise : The level of exposure to noise compared to a reference period of eight hours must not exceed a sound pressure of 80 dB (A), protection included. The values must be specified by the manufacturer and comply with current standards.

Vibrations : The exposure level should be as close as possible to 2.5 m/s². At a minimum, the maximum value must not exceed 10m/s² (corresponding to a maximum daily cumulative use of 2 hours). Triaxial values must be specified by the manufacturer and comply with current standards.

Weight : The weights quoted are the weights of the tools sometimes without the consumable. The objective is to offer the lightest possible equipment.

Grip : Handles and grip surface offering good grip. Handling the machine should not constrain the wrist (no bending or breaking, no need for postures with extended wrists), non-slip tool handle (Soft-Grip)

Dust : Dust capture system at source for all relevant tools

Shocks electric : Class 2 (excluding core drill: class 1)

IP : (Protection index provided by the tool casing) 20 with the exception of the core drilling machine-IP55

Safety : Depending on the type of machine: dead man system, stopping brake and protective guard (specified for each family)

Catalog logos



SYSTEME
D'ASPIRATION
OBLIGATOIRE

Mandatory collection and suction system for working with wood or materials containing silica



Vibration value $> 10\text{m/s}^2$ = maximum cumulative exposure per day and per companion reduced



Points of vigilance specific to the tool



Mandatory prior agreement from the Prevention Health Safety Department



Tool weight requiring special measurements



Mandatory in-depth specific training carried out by DISTRIMO, the supplier or the distributor



Alternative solution to the 125 grinder



Machine sold without battery or charger



Validated machine *Wood construction*



AMPShare battery platform common to multiple brands

Powered by  BOSCH

THE BATTERIES

AMPSHARE COMMON MULTI-BRAND PLATFORM



AMPShare is the multi-brand battery system for crafts and industry. This shared battery system allows you to change professional tools and brands without asking any questions.

Advantages :

AMPShare batteries are fully compatible with all multi-brand alliance tools

They combine extreme power, long battery life and exceptional durability

No need to buy new batteries for each new tool. No more searching for the “right” battery. With AMPShare , one and the same battery is enough.

Reduce clutter and complexity. With AMPShare , you will never have to carry around different batteries and chargers with you again



18V / 12Ah / 1.35kg



18V / 8Ah / 0.955kg



18V / 5.5Ah / 0.955kg



18V / 4Ah / 0.515kg

Choice of batteries: the greater the autonomy, the greater the weight of the battery = be careful not to disrupt the balance of the machines and create ergonomic constraints.

Ex: using a 12Ah 1.35kg battery on a 0.9kg screwdriver makes no sense .



FEIN

Klauke

THE BATTERIES

HILTI NURON

NURON

Hilti's all-new wireless platform with built-in connectivity. Nuron is based on a unique battery system that covers all applications, from the lightest to the heaviest

Advantages :

Increased autonomy: Benefit from the performance of wired, thermal, 36 V and beyond, but with the weight, balance and ergonomics of a 22 V platform, for more comfort all day long of work.

The comfort of a single platform: Carry out all your applications with the same 22 V Nuron platform , Use the same set of interchangeable batteries for more than 70 tools.

Reduced downtime: Built-in diagnostics alert you to battery health, while tool connectivity simplifies fleet management.



Batterie Nuron B
22-55



Batterie Nuron B
22-85



Batterie Nuron B
22-110



Batterie Nuron B
22-170



Batterie Nuron B
22-255

22V / 2.6Ah / 0.7kg

22V / 4Ah / 0.76kg

22V / 5.2Ah / 0.91kg

22V / 8Ah / 1.31kg

22V / 12Ah / 1.84kg

Choice of batteries: the greater the autonomy, the greater the weight of the battery = be careful not to disrupt the balance of the machines and create ergonomic constraints.
Ex: using a 1.85kg 12Ah battery on a 1.3kg screwdriver makes no sense .

AUTONOMOUS BATTERY

AUTONOMOUS 220V BATTERY

FESTOOL SYS-PowerStation SYS-PST 1500 Li HP



This mobile power station makes you independent of traditional power sources. With 3,680 W continuous and up to 18,000 W peak power, it delivers more than enough power to power all corded tools, including vacuum cleaners, saws and drills, continuously and without loss of power. Compact and mobile: with 1,500 Wh of stored energy, you have sufficient energy for a full day of work on the vast majority of construction sites.

Technical characteristics

Output voltage: 230 V ~ / 50 Hz pure sine

Continuous power: 3680W

Maximum power (<0.5 sec): 18000 W

Rated energy content: 1555Wh

Charging time (depending on cell temperature): 3.0 h

Protection index: IP 44

Weight: 16.5kg

Pablo code : EL114538



Connecting a tool to an intermediate socket (vacuum cleaner, power strip, bench grinder, etc.) = 30mA differential protection required on each socket used



Tool weight requiring special measurements

AUTONOMOUS BATTERY

AUTONOMOUS 220V BATTERY

HILTI B 3600



Nouveau!

Portable, temporary power supply with high power and capacity for use with heavy-duty power tools

Technical characteristics

Output voltage: 230 V ~ / 50 Hz pure sine

Continuous power: 3600W

Maximum power (<120 sec): 7200 W

Rated energy content: 2100Wh

Protection index: IP 54

Weight: 20kg

Pablo code : EL127891



Connecting a tool to an intermediate socket (vacuum cleaner, power strip, bench grinder, etc.) = 30mA differential protection required on each socket used



Tool weight requiring special measurements

THE ACCESSORIES

WORKTABLE

BOSCH PWB 600



Nouveau!

Foldable in seconds, easily transportable and space-saving in the folded position, the PWB 600 workbench constitutes a very practical mobile work support. Its flexible clamping jaws allow you to clamp even complex-shaped parts to perform demanding jobs with precision. The sturdy structure and solid bamboo worktop are suitable for round, thick and massive workpieces.

Technical characteristics

Length of the work table: 680mm

Height of the work table : 834mm

Maximum load capacity : 200kg

Weight: 11.6 kg

Pablo code : EL127495

THE ACCESSORIES

MAGNETIC VICE

FEIN VERSAMAG VICE SET



Nouveau!

Compact and powerful permanent magnet with vice for tool-free clamping of various components on magnetic surfaces. Thanks to the permanent magnet, the vices are no longer attached to the work table, but can be used precisely where rapid clamping previously represented a great challenge: on construction sites and in workshops, on vertical planes - and above all for small, quick tasks. Simple. Mobile. Flexible. It's the perfect solution that combines both firm hold and rapid results.

Technical characteristics

Height and width of jaws : 40x100mm

Dimensions of the magnetic foot : 212x70mm

Magnetic

Weight: 7.25kg

Pablo code : EL143438

60mm heightening jaw: Pablo code: EL143441



If there is a risk of the vice falling = retaining strap required




Surface, sand, polish

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source



Value \leq 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Hold the tool with 2 hands*

* *Excluding Makita battery sander*

Surface, sand, polish

SURFACERS and CORDED SANDERS

HILTI DGH 150



Intensive sanding of concrete and stripping of paint, glue and other coatings

Technical characteristics

Diameter: 150mm

Power : 2100W

Vibration value : 10.5m/s²

Weight : 5.6kg

Pablo code : EL020012



The Expendables

- Universal diamond grinding wheel for concrete and natural stone S PX Code Pablo **EL017936** - SP Code Pablo **EL018103**
- Diamond finishing wheel for concrete and natural stone SPX Code Pablo **EL017903**
- Abrasive diamond wheel for fresh concrete SPX Code Pablo **EL017927**
- Diamond grinding wheel for removing coatings SPX Code Pablo **EL121891**
- Epoxy diamond grinding wheel SPX Code Pablo **EL018104**

Connect the suction

- Vacuum cleaner (see page 190)
- Diameter int./ext . _ _ connection: 49/54mm



Surface, sand, polish

SURFACERS and CORDED SANDERS

HILTI DGH 130



Light sanding and finishing of wall and floor surfaces

Technical characteristics

Diameter: 130mm

Power: 1300W

Vibration value : 6.8m/s²

Weight: 2.5kg

Pablo code: EL018493



Alternative solution
to the 125 grinder

The Expendables :

- Wide choice of consumables: Consult DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection:
49/54mm



Surface, sand, polish

CORDED ECCENTRIC SANDERS

MAKITA BO6030J



Finish sanding all materials

Technical characteristics

Diameter : 150mm

Power : 310W

Vibration value : 4m/s²

Weight : 2.4kg

Pablo code : EL005335



The Expendables

- Abrasive discs diameter 125 self-gripping 8 holes wood/metal or multi materials (several grains available): contact DISTRIMO

Connect the suction

- Dust box + paper dust bag
- Vacuum cleaner (see page 190)
- Connection diameter: 22mm



Surface, sand, polish

CORDED ECCENTRIC SANDERS

MAKITA BO5041J



Finishing sanding of all materials

Technical characteristics

Diameter: 125mm

Power: 300W

Vibration value: 3.5m/s²

Weight: 1.4kg

Pablo code: EL008689



The Expendables

- Abrasive discs diameter 125 self-gripping 8 holes wood/metal or multi materials (several grains available): contact DISTRIMO

Connect the suction

- Dust box + paper dust bag
- Vacuum cleaner (see page 190)
- Connection diameter: 22mm



Surface, sand, polish

BATTERY ECCENTRIC SANDERS

MAKITA DBO180 RTJ



Finish sanding all materials

Technical characteristics

Diameter : 125mm

Power : 18V- 5 Ah

Vibration value : 2.5m/s²

Weight : 1.7kg

Pablo code : EL018392



The Expendables :

- Abrasive discs diameter 125 self-gripping 8 holes wood/metal or multi materials (several grains available): contact DISTRIMO

Connect the suction

- Dust box + paper dust bag
- Vacuum cleaner (see page 190)
- Connection diameter: 22mm



Surface, sand, polish

BATTERY ECCENTRIC SANDERS

BOSCH GEX 18V-125



Nouveau!

Finish sanding all materials

Technical characteristics

Diameter : 125mm

Power : 18V

Vibration value : 2.2m/s²

Weight : 1.1kg (without battery)

Pablo code : EL142388



The Expendables :

- Abrasive discs diameter 125 self-gripping 8 holes wood/metal or multi materials (several grains available): contact DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 35 mm

MAKITA 9403J



Belt sander

Technical characteristics

Max speed : 500m/min

Dimensions of abrasives: 100x610 mm

Power: 1200W

Vibration value: 2.5m/s²

Weight: 5.7kg

Pablo Code: EL005332



The Expendables :

- Abrasive belt 100x610 for wood/metal available in several grains: contact DISTRIMO

Connect the suction

- Fabric dust bag
- Vacuum cleaner (see page 190)
- Connection diameter: 38mm



Surface, sand, polish

Tube sander

FEIN SET RS 17-70 E

Nouveau!



Tube sander with maximum output for stainless steel tubes and bends up to \varnothing 80 mm

Technical characteristics

Band width : 20/40 X 815 mm

Power : 17,00W

Vibration value: 5.9 m/s²

Weight : 4.3kg

Pablo code: EL020161



Alternative solution
to the 125 grinder

The Expendables :

- Wide choice of consumables: Consult DISTRIMO



FEIN BF 10-280 E SET PRO



Steel band file for hard to reach places
Possibility of polishing

Technical characteristics

Band width : 3.6 or 20mm
Power: 800W
Vibration value: 2m/s²
Weight: 2.1kg
Pablo Code: EL104713



Alternative solution
to the 125 grinder

The Expendables :

- Wide choice of consumables: Consult DISTRIMO
- Abrasive belt ceramic grain 80 to 180 width 20mm, 6mm or 3mm
- Fiber tape fine, medium texture Or rude width 20mm or 6mm
- Polishing strip width 20mm or 6mm

Surface, sand, polish

Specific industrial sanding solutions

XM165 kit for sanding concrete walls



Complete solution for industrial wall sanding to limit postural and tool carrying constraints.

Technical characteristics

Sanding plate diameter: 165mm

Power: 1600W

Vibration value: 0.27m/s²

Weight: 6.7kg

Kit composition: 1 XM165 sander, 1 converter, 1 gantry, 1 load balancer system and 1 vacuum cleaner.

Pablo code: EL121909 or [link to help with choices Box 0 Difficulty](#)



The Expendables :

- Wide choice of consumables: Consult DISTRIMO

Surface, sand, polish

Specific industrial sanding solutions

XB165 kit for sanding concrete floors



Complete solution for industrial floor sanding to limit postural and tool carrying constraints. This solution includes an extension sander and a vacuum cleaner.

Technical characteristics

Sanding pad diameter: 165mm

Power: 1600W

Vibration value: 0.27m/s²

Weight: 6.7kg

Kit composition: 1 XB165 sander, 1 converter, 1 sanding arm and 1 vacuum cleaner.

Pablo code: EL116906 or [link to help with choices Box 0 Difficulty](#)



The Expendables

- Wide choice of consumables: Consult DISTRIMO

Surface, sand, polish

Specific industrial sanding solutions

XB165 kit for sanding concrete ceilings



Complete solution for industrial ceiling sanding to limit postural and tool carrying constraints.

Technical characteristics

Sanding plate diameter : 165mm

Power : 1600W

Vibration value: 0.27m/s²

Weight: 6.7kg

Kit composition: 1 XB165 sander, 1 converter, 1 sanding cart and 1 vacuum cleaner.

Pablo code: EL127630 or [link to help with choices Box 0 Difficulty](#)



The Expendables

- Wide choice of consumables: Consult DISTRIMO

Surface, sand, polish

Specific sanding solutions

Planex LHS 2 225/CTM36 Set ride-on sander



Drywall sanding with lighting and vacuum. adjustable suction maintains its own weight on the wall or ceiling,

Technical characteristics

Sanding plate diameter: 220mm

Power : 400W

Vibration value: 2.5 m/s²

Weight: 4.7kg

Kit composition: 1 LHS 2 arm sander, 1 vacuum cleaner, arm extensions

Pablo code: EL114530



The Expendables

- Several abrasives available: contact DISTRIMO
- Arm support harness: Code Pablo **EL123611**

Poke and chisel


MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Anti-restart system



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands

Poke and chisel

WIRED AND BATTERY POINTERS

HILTI TE300 AVR + TE DRS-C



Drywall sanding with lighting and vacuum. Adjustable suction holds its own weight to the wall or ceiling

Technical characteristics

Power : 850W - 3.3J

Vibration value : 13.5m/s²

Weight : 3.8kg

Chuck: SDS plus

Pablo code : EL104928



Maximum duration of use: 1 hour 10 minutes per day (per cumulative companion)



Mounting the side handle requires installation of the TE DRS-C dust collection system

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus pointed chisel length 250mm: EL131508
- SDS Plus flat chisel width 20mm: EL131509
- SDS Plus spade chisel width 60mm: EL131510
- Wide choice of consumables: Consult DISTRIMO

Connect the suction

- TE DRS-C capture system (chisel length from 180mm to 250mm)
Pablo code **EL020285**
- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 33/48mm



Poke and chisel

WIRED AND BATTERY POINTERS

HILTI TE300-A36 APR



Lightweight cordless chipper for surface correction work on concrete and masonry

Technical characteristics

Chuck type: SDS+

Power: 36V - 5.2 Ah - 3.6J

Vibration value: 7.9 m/s²

Weight: 4.9kg

Chuck: SDS plus

Pablo code: EL018356



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus pointed chisel length 250mm: EL131508
- SDS Plus flat chisel width 20mm: EL131509
- SDS Plus spade chisel width 60mm: EL131510
- Wide choice of consumables: Consult DISTRIMO

Connect the suction

- TE DRS-C capture system (chisel length from 180mm to 250mm) Pablo code **EL020285**
- Int / ext diameter of the connection: 33/48mm
- Vacuum cleaner (see page 190)



Poke and chisel

CORDED CHIPPERS

HILTI TE 2000 APR



Powerful chipper for concrete floor work and demolition work

Technical characteristics

- Chuck Type:** TE-S
- Power:** 2100W- 35 joules
- Vibration value:** 4.8m/s²
- Weight:** 14kg
- Pablo code:** EL018515



The Expendables

- The length of the consumable must be adapted to the capture system
- Transport trolley for TE 2000 AVR: Pablo code EL018520
- Hexagonal pointed chisel length 400mm: EL131514
- Flat hexagon chisel width 25mm: EL131515
- Hexagon spade chisel width 80mm: EL131516
- Wide choice of consumables: Consult DISTRIMO

Connect the suction

- TE DRS-B capture system (chisel length from 290mm to 500mm) Pablo code **EL005359**
- Int / ext diameter of the connection: 43/56mm
- Vacuum cleaner (see page 190)



HILTI TE 1000 APR



Versatile chipper for demolition or chipping of floors

Technical characteristics

Chuck Type: TE-S

Power: 1750W - 26 Joules

Vibration value: 5m/s²

Weight: 12.5kg

Pablo code : EL105475



The Expendables

- The length of the consumable must be adapted to the capture system
- Hexagonal pointed chisel length 400mm: EL131514
- Flat hexagon chisel width 25mm: EL131515
- Hexagon spade chisel width 80mm: EL131516
- Wide choice of consumables: Consult Distrimo

Connect the suction

- TE DRS-B capture system (chisel length from 290mm to 500mm) Pablo code **EL005359**
- Int / ext diameter of the connection: 43/56mm
- Vacuum cleaner (see page 190)



Poke and chisel

CORDED CHIPPERS

HILTI TE 700 APR



Powerful chisel for difficult chiselling in concrete and masonry

Technical characteristics

Chuck Type: SDS-Max

Power: 1300W- 11.5 joules

Vibration value: 6.5m/s²

Weight: 7.9kg

Pablo code: EL009433



The Expendables

- The length of the consumable must be adapted to the capture system
- Pointed chisel SDS Max length 400mm: EL131511
- SDS Max flat chisel width 25mm: EL131512
- SDS Max spade chisel width 50mm: EL131513
- Wide choice of consumables: Consult Distrimo

Connect the suction

- TE DRS-B capture system (chisel length from 290mm to 500mm) Pablo code **EL005359**
- Int / ext diameter of the connection: 43/56mm
- Vacuum cleaner (see page 190)



Poke and chisel

BATTERY CHIPPERS

BOSCH GSH 5 CE



SDS max jackhammer especially designed for horizontal chiseling work in concrete and stone

Technical characteristics

Chuck Type: SDS Max

Power: 1150W - 8.3 Joules

Vibration value: 10.6 m/s²

Weight: 6.1kg

Pablo Code: EL142385



The Expendables

- The length of the consumable must be adapted to the capture system
- Pointed chisel SDS Max length 400mm: EL131511
- SDS Max flat chisel width 25mm: EL131512
- SDS Max spade chisel width 50mm: EL131513
- Wide choice of consumables: Consult Distrimo

Connect the suction

- GDE MAX capture system Code Pablo **EL101543**
- Internal diameter of the connection: 35mm
- Vacuum cleaner (see page 190)



Poke and chisel

BATTERY CHIPPERS

HILTI TE 500-22 APR



NURON



SDS Max cordless jackhammer and chisel for chiseling in concrete or masonry

Technical characteristics

Chuck Type: SDS Max

Power: 22V - 8.1 Joules

Vibration value: 8.7 m/s²

Weight: 6kg (without battery)

Pablo Code: EL134447



The Expendables

- The length of the consumable must be adapted to the capture system
- Pointed chisel SDS Max length 400mm: EL131511
- SDS Max flat chisel width 25mm: EL131512
- SDS Max spade chisel width 50mm: EL131513
- Wide choice of consumables: Consult Distrimo

Connect the suction

- TE DRS-B capture system (chisel length from 290mm to 500mm) Pablo code **EL005359**
- Int / ext diameter of the connection: 43/56mm
- Vacuum cleaner (see page 190)



Poke and chisel

CORDED CHIPPERS

HILTI TE 500 APR



Versatile chisel for light chiselling in concrete and masonry

Technical characteristics

- Chuck Type:** SDS Max
- Power:** 1350W - 8.5 Joules
- Vibration value:** 6.8m/s²
- Weight:** 6.3kg
- Pablo Code:** EL020463



The Expendables

- The length of the consumable must be adapted to the capture system
- Pointed chisel SDS Max length 400mm: EL131511
- SDS Max flat chisel width 25mm: EL131512
- SDS Max spade chisel width 50mm: EL131513
- Wide choice of consumables: Consult Distrimo

Connect the suction

- TE DRS-B capture system (chisel length from 290mm to 500mm) Pablo code **EL005359**
- Int / ext diameter of the connection: 43/56mm
- Vacuum cleaner (see page 190)




This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Anti-restart system
Dead man system
Anti-twist system



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source



Value \leq 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands

HILTI TE2-22



NURON



Compact and lightweight SDS Plus cordless drill with pistol grip for better maneuverability when drilling on ceilings

Technical characteristics

Chuck Type: SDS Max
Power: 22V - 1.5 Joules
Impact drilling range: 4-22mm
Vibration value: 13.7m/s²
Weight: 2.3kg without battery
Pablo code: EL126978



Maximum duration of use: 1 hour 10 minutes per day (per cumulative companion)



Lack of anti-torsion system

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus 7X concrete drill: EL135731
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS-D capture system (diameter 5 to 55mm) Pablo code EL018576
- Int / ext diameter of the connection: 35/41mm
- Vacuum cleaner (see page 190)



HILTI TE 6-22 ATC APR

NURON



Versatile SDS Plus cordless drill with a wide drilling range, tapping function and quick-change chuck

Technical characteristics

Chuck Type: SDS-Plus

Max diameter concrete: 28mm

Power: 22V - 2.6 Joules

Vibration value: 10.7 m/s²

Weight: 2.84 kg without battery

Pablo code: EL126980



Maximum usage time:
1h45 per day (per
cumulative companion)

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus 7X concrete drill: EL135731
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS 4/6 autonomous suction kit (diameter 4 to 20mm an maximum depth 100mm), Pablo code **EL126981**
- TE DRS-C capture system (Maximum depth 105mm), Pablo code **EL020285**
 - ✓ Int / ext diameter of the connection: 33/48mm
- TE DRS-D capture system (diameter 5 to 55 mm, maximum depth 105 chisel length 180 to 250mm) Pablo code **EL018576**
 - ✓ Int / ext diameter of the connection: 35/41mm
- Vacuum cleaner (see page 190)



BOSCH GBH 18V-28 DC



SDS Plus cordless perforator High performance with KickBack Control

Technical characteristics

- Chuck Type:** SDS-Plus
- Max diameter concrete:** 28mm
- Power:** 18 V - 3.4 Joules
- Vibration value:** 10.1 m/s²
- Weight:** 3 kg without battery
- Pablo Code:** EL142366



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus 7X concrete drill: EL135731
- Hollow bits: Consult Distrimo

Connect the suction

- GDE 28 D autonomous suction device (MAX diameter 28mm a maximum depth 100mm), Pablo code **EL142367**
- GDE 68 and GDE 162 capture system (max diameter 68mm and 162mm) Pablo code GDE 68: EL101540 GDE 162: EL101546
- GDE 16 Plus capture system (max diameter 16mm) Pablo code EL101544
- Vacuum cleaner (see page 190)



HILTI TE 30-22 ATC/AVR



NURON



Drilling anchor holes in concrete and masonry. Drilling holes for reinforcing iron seals. Light chiselling – such as tile scraping, recessing and picking

Technical characteristics

- Chuck Type:** SDS Plus
- Power:** 22 V - 3.8 Joules
- Max diameter concrete:** 28mm
- Vibration value:** 11.1m/s²
- Weight:** 3.9 kg without battery
- Pablo Code:** EL134445



Maximum usage time:
1h40 per day (per
cumulative companion)

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus 7X concrete drill: EL135731
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS-C capture system (Maximum depth 105mm), Pablo code **EL020285**
 - ✓ Int / ext diameter of the connection: 33/48mm
- TE DRS-D capture system (diameter 5 to 55 mm, maximum depth 105mm, chisel length 180 to 250mm), Pablo code **EL018576**
 - ✓ Int / ext diameter of the connection: 35/41mm
- Vacuum cleaner (see page 190)



BOSCH GBH 18V-34 CF



the most powerful SDS plus cordless hammer drill in its class for demanding concrete work

Technical characteristics

- Chuck Type:** SDS-Plus
- Max diameter concrete:** 32 mm
- Power:** 18 V - 5.8 Joules
- Vibration value:** 10.9 m/s^2
- Weight:** 4.9 kg without battery
- Pablo Code:** EL142368



Maximum usage time:
1h40 per day (per
cumulative companion)

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Plus 7X concrete drill: EL135731
- Hollow bits: Consult Distrimo

Connect the suction

- GDE 68 and GDE 162 capture system (max diameter 68mm and 162mm) Pablo code GDE 68: EL101540 GDE 162: EL101546
- GDE 16 Plus capture system (max diameter 16mm) Pablo code EL101544
- Vacuum cleaner (see page 190)



HILTI TE 60-22 ATC/AVR

NURON



SDS Max cordless hammer drill with active vibration reduction and anti-twist system for heavy-duty drilling and chipping in concrete

Technical characteristics

Chuck Type: SDS-Max

Max diameter concrete 40 mm

Power: 22 V - 8.1 Joules

Vibration value: 10.7 m/s²

Weight: 6.3 kg without battery

Pablo Code: EL134446



Maximum usage time:
1h45 per day (per
cumulative companion)

The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS-Y capture system (diameter 12 to 52 mm, maximum depth 300 mm, chisel length from 250mm to 500mm), Pablo code **EL010078**

Int / ext diameter of the connection: 42/57mm

- TE DRS-D capture system (diameter 5 to 55 mm, maximum depth 105mm, chisel length 180 to 250mm), Pablo code **EL018576**

Int / ext diameter of the connection: 35/41mm

- Vacuum cleaner (see page 190)



BOSCH GBH 18V-40 C



drill for chiselling in concrete and drilling up to 40 mm in diameter

Technical characteristics

Chuck type: SDS-MAX

Max diameter concrete: 40 mm

Power: 18 V - 9 Joules

Vibration value: 7.5 m/s²

Weight: 7 kg without battery

Pablo Code: EL142369



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction

- GDE MAX capture system (for chiselling) Pablo code EL101543
- GDE 68 and GDE 162 capture system (max diameter 68mm and 162mm Code Pablo EL101540 EL101546
- Vacuum cleaner (see page 190)



BOSCH GBH 18V-45 C



The versatile Heavy Duty rotary hammer for drilling and chiseling in concrete up to 45 mm

Technical characteristics

Chuck type: SDS-MAX

Max diameter concrete: 45 mm

Power: 18 V - 12.5 Joules

Vibration value: 7.3 m/s²

Weight: 8 kg without battery

Pablo Code: EL142370



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction

- GDE MAX capture system (for chiselling) Pablo code EL101543
- GDE 68 and GDE 162 capture system (max diameter 68mm and 162mm Code Pablo EL101540 EL101546
- Vacuum cleaner (see page 190)



HILTI TE 30 ATC/AVR



Drilling for dowels, reinforcing bars and penetrations in concrete and masonry; Chiselling on brick and concrete block, corrective stitching and surface finishing on concrete

Technical characteristics

- Chuck type** : SDS-Plus
- Impact drilling diameter range**: 4-28 mm
- Power** : 3.6 Joules
- Vibration value** : 9.3m/s²
- Weight** : 4.2kg
- Pablo code** : EL106307



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS-C capture system (Maximum depth 105mm) Pablo code **EL020285**
 - ✓ Int / ext diameter of the connection: 33/48mm
- TE DRS-D capture system (diameter 5 to 55 mm, maximum depth 105mm, chisel length 180 to 250mm), Code Pablo **EL018576**
 - ✓ Int / ext diameter of the connection: 35/41mm
- Vacuum cleaner (see page 190)



HILTI TE 60 ATC/AVR



Drilling holes for doweling and penetrations in concrete and masonry - Medium-sized demolition work

Technical characteristics

Chuck Type: SDS Max

Power: 1300W - 7.8 Joules

Max diameter concrete: 40mm; **Steel :** 20mm; **wood :** 32mm

Vibration value: 6.4m/s²

Weight: 7.8kg

Pablo Code: EL020565



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction

- TE DRS-Y capture system (diameter 12 to 52 mm, maximum depth 300 mm, chisel length from 250mm to 500mm), Pablo code **EL010078**
- Int / ext diameter of the connection: 42/57mm
- Vacuum cleaner (see page 190)



HILTI TE 70 ATC/AVR



Very powerful hammer drill for difficult drilling and chipping in concrete

Technical characteristics

Chuck type : SDS-Max

Impact drilling diameter range: 12 -55 mm

Power : 14.5 Joules

Vibration value : 8.3m/s²

Weight : 10kg

Pablo code : EL101626



The Expendables

- The length of the consumable must be adapted to the capture system
- SDS Max 8X concrete drill bit: EL135732
- Hollow bits: Consult Distrimo

Connect the suction


- TE DRS-Y capture system (diameter 12 to 52 mm, maximum depth 300 mm, chisel length from 250mm to 500mm), **EL010078**
- Int / ext diameter of the connection: 42/57mm
- Vacuum cleaner (see page 190)



Drill, screw, bolt

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. There are other models meeting these requirements for specific needs: contact **DISTRIMO** Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s^2 maximum = maximum cumulative exposure 2h/d per companion



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Depending on the task and materials, other screwdrivers may be more suitable. Contact the **DISTRIMO power tool representative.**

FEIN KBC36-MAGFORCE



Compact 1-speed magnetic core drilling unit, space-saving and extremely lightweight for use in confined spaces in workshops and on construction sites.

Technical characteristics

Power: 1200W

Ø max. of carbide cutter: 36mm

Ø max. HSS cutter width: 36mm

Max. drilling depth cutter: 35 mm

Vibration value : 2.5m/s²

Weight : 8.5 kg

Pablo code : EL129163

Optional accessories

- Suction cup plate for non-magnetic materials 250x330x110mm
Pablo code: **EL104889**



FEIN KBU 35 PQW



Universal wired magnetic drilling unit up to 35 mm
Mobile drilling jobs, such as core drilling, twist drilling, tapping, chamfering and reaming. Core drilling up to \varnothing 35 mm

Technical characteristics

Power: 1100W
 \varnothing max. of carbide cutter: 35mm
 \varnothing max. HSS cutter width: 35mm
Max. drilling depth milling cutter: 50mm
Vibration value : 2.5m/s²
Weight : 12.1kg
Pablo code : EL104726

Optional accessories

- Suction cup plate for non-magnetic materials 250x330x110mm
Pablo code: **EL104889**
- Tube drilling device Code Pablo: **EL118447**



FEIN AKBU35 PMQW AS



Universal cordless magnetic drilling unit up to 35 mm. Mobile drilling jobs, such as core drilling, twist drilling, tapping, chamfering and reaming. Core drilling up to \varnothing 35 mm

Technical characteristics

Voltage: 18V

\varnothing max. of carbide cutter: 35mm

\varnothing max. HSS milling cutter: 35mm

Max. drilling depth cutter: 50 (75*) mm

Vibration value: 0.6m/s²

Weight without battery : 12.1kg

Code Pablo: EL143471

Optional accessories

- Suction plate for non-magnetic materials 250x330x110 mm Code Pablo **EL104889**
- Drilling device for tube Code Pablo **EL118447**



FEIN KBM 50 UQW



Wired metal drilling unit up to 50 mm

Technical characteristics

Power: 1200W

Ø max. of the carbide cutter: 50mm

Ø max. HSS milling cutter: 40mm

Max. drilling depth milling cutter: 50mm


Vibration value : 2.5m/s²

Weight : 14kg

Pablo code : EL020174

Optional accessories

- Suction plate for non-magnetic materials 250x330x110 mm
Code Pablo **EL104889**
- Tube drilling device Code Pablo: **EL118447**

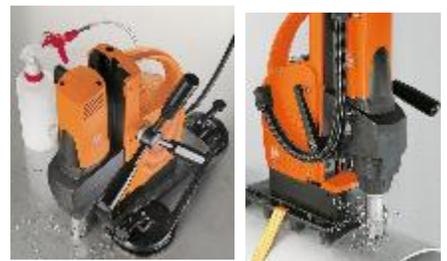

FEIN KBM 65 UQW



Wired metal drilling unit up to 65 mm

Technical characteristics

Power: 1300W

Ø max. of carbide cutter: 65mm

Ø max. HSS milling cutter: 45mm

Max. drilling depth 50mm **milling cutter**

Vibration value : 2.5m/s²

Weight : 15.7kg

Pablo code : EL020175



Tool weight requiring special measurements

Optional accessories

- Suction plate for non-magnetic materials 250x330x110 mm
Code Pablo **EL104889**
- Drilling device for tube Code Pablo **EL118447**



FEIN KBU 110-4M



Corded universal magnetic drilling unit. Drilling work, such as core drilling, twist drilling, tapping, chamfering and reaming. Core drilling up to Ø 110 mm

Technical characteristics

Power: 1700W

Ø max. of carbide cutter: 110 mm

Ø max. HSS cutter width: 80 mm

Max. drilling depth cutter: 100 mm

Weight : 39kg

Pablo code : EL112237



Tool weight requiring special measurements

HILTI SF4-22

NURON



Compact cordless drill driver with anti-twist system for drilling and screwdriving tasks

Technical characteristics

Battery: 22V

No-load speed: 610 to 21,00 rpm

Maximum torque: 62 Nm

2 speeds: 610 / 2100 rpm

Vibration value : 1.8 m/s²

Weight : 1.3 kg without battery

Pablo code : EL126986



BOSCH GSR 18V 90FC

AMP Share

Powered by BOSCH



*Drilling, screwing, equipped with a removable FlexiClick System chuck allowing rapid switching from one accessory to another.
Electronic torque adjustment*

Technical characteristics

Battery: 18V

Steel drilling capacity : up to 13mm

Maximum torque: 60Nm

2 speeds: 600 / 1,900 rpm

20 torque adjustment ranges

Vibration value : 1.5m/s²

Weight : 0.9kg (without battery)

Pablo code : EL129223



Accessories included

- Flexiclick accessories individually: Contact DISTRIMO
 - ✓ Angle transmission
 - ✓ Eccentric chuck
 - ✓ 13mm metal chuck
 - ✓ 13mm plastic chuck
 - ✓ SDS Plus drill chuck ø10mm max with additional handle

FEIN ASCM18 QM SELECT



Drilling, screwing, equipped with a removable chuck allowing quick change from one accessory to another.

Electronic torque adjustment

Technical characteristics

Battery: 18V

Steel drilling and tapping capacity : up to 12mm

Maximum torque: 90Nm

4 speeds: 400 / 800 / 1950 / 3850 rpm

15 torque adjustment range

Maximum capacity wood screw: 10 x 400mm

Vibration value : 1.5m/s²

Weight : 2.2kg (with battery)

Pablo code : EL020172



Optional QuickIN accessories

- ✓ bit holder (1/4 in), **EL104898**
- ✓ adapter for sockets (1/2 in) **EL104902**
- ✓ tapping adapter with 2 collets for shank diameters 4.5 and 6 mm **EL104901**
- ✓ Angle transmission **EL104896**
- ✓ Adapter for metal hole saw **EL104899**
- ✓ **EL104897** drill chuck
- ✓ Drill chuck 60Nm **EL104903**
- ✓ Drill chuck 120Nm **EL104900**



MAKITA DDF486RTJ



Drilling, screwing

Technical characteristics

Battery: 18V

No-load speed: 0- 550 / 2100rpm

Maximum torque: 130 / 65 Nm

21 torque adjustment ranges

Drilling capacity in steel/wood: 13/76mm

Maximum wood screw capacity: 10 x 90mm

Vibration value : 2.5m/s²

Weight : 2.6kg

Pablo code : EL017079



Drill, screw, bolt

DRILLS

BOSCH GSR 18V 110C



Drilling, screwing

Technical characteristics

Battery: 18V

Steel/wood drilling capacity : 13/82mm

Maximum torque: 110Nm

2 speeds: 0 to 480/0 to 2100 rpm

26 torque adjustment ranges

Vibration value : 2.5m/s²

Weight : 2kg

Pablo code : EL101523



HILTI SF10W-A22 ATC



Drill driver with anti-twist system and four-speed gear for high torque in wood and other materials

Technical characteristics

Battery: 21.6V

Maximum torque: 72 Nm (screwing into soft wood), 120 Nm (screwing into dense wood)

4 speeds: 310 rpm; 530 rpm; 1210 rpm; 2100 rpm

Vibration value : 2.5m/s²

Weight : 3.3 kg

Pablo code : EL018110



MAFELL A18



Nouveau!

The impulse function provides the decisive additional energy in critical situations.

Technical characteristics

Battery: 18V

Wood/steel drilling capacity: up to 68/13mm

Maximum torque: 65 Nm (pulse); 130Nm (force)

Vibration value : 2.5 m/s²

2 speeds: 56 0 rpm; 1960 rpm

Weight : 1.8kg

Pablo code : EL132185



KMR 3338



For screwing fast construction screws (gypsum board screws), wood construction screws and chipboard screws and similar materials, TEKS wing screws, when wood is screwed to sheet metal.

Technical characteristics

Power: 750W

Screw diameter : 4.5mm and 5.0mm

Screw length: 40mm to 80mm

Magazine capacity: 125

Vibration value : 2.5 m/s²

Weight : 2.9 kg

Pablo code : EL126640



The accessories

- ✓ Extension / pole for automatic screwdrivers with charger KMR **EL128404**
- ✓ Bit holder M6 **EL128400**
- ✓ Bits M6 TX20 **EL128402**; M6 TX25 **EL128403**

Drill, screw, bolt

AUTOMATIC BATTERY-POWERED
SCREWDRIVER

KMR 3383



For screwing fast construction screws (gypsum board screws), wood construction screws and chipboard screws and similar materials, TEKS wing screws, when wood is screwed to sheet metal.

Technical characteristics

Battery : 18W

Screw diameter : 4.5mm and 5.0mm

Screw length: 40mm to 80mm

Magazine capacity: 125

Maximum torque : 96Nm

Vibration value : 2.5 m/s²

Weight : 3.7 kg

Pablo code : EL126641



The accessories

- ✓ Extension / pole for automatic screwdrivers with charger KMR **EL128404**
- ✓ Bit holder M6 **EL128400**
- ✓ Bits M6 TX20 **EL128402**; M6 TX25 **EL128403**

MAKITA TD022DSEX



Drilling, screwing

Technical characteristics

Battery: 7.2V

Max speed: 2450 rpm

Maximum torque: 25Nm

Shock cadence: 3000 cps/min

Maximum wood screw capacity: 45mm

Vibration value: 6.5 m/s²

Weight: 0.56kg

Pablo Code: EL009924

HILTI SIW 4AT-A22

NURON



1/2" cordless impact wrench

Technical characteristics

Battery: 22V

Rotation speed: 3 (1000 rpm; 1500 rpm; 2300 rpm)

Maximum torque: 90 Nm (1); 135Nm (2); 213 Nm (3)

Vibration value : 9.1m/s²

Fitting : 1/2" square

Weight : 1.03kg without battery

Pablo code : EL133821



Machine sold without battery or charger



HILTI SIW 6-22

NURON



1/2" cordless impact wrench

Technical characteristics

Battery: 22V

Maximum torque: 450 Nm

Vibration value : 13.9m/s²

Fitting : 1/2" square

Weight : 1.8kg without battery

Pablo code : EL126993



Maximum usage time:
57 min per day (per
cumulative companion)

HILTI SIW 9-A22



3/4" cordless impact wrench Recommended for B20 formwork

Technical characteristics

Battery: 22V

Maximum torque: 800Nm

Vibration value : 7m/s²

Fitting : 3/4" square

Weight : 4.7kg

Pablo code : EL104769

MAKITA TW001GM201



3/4" cordless impact wrench

Technical characteristics

Battery: 40V

4 speeds : 950/1150/1400/1800 rpm

Maximum torque: 1800 Nm

Vibration value : 18.5m/s²

Fitting : 3/4" square

Weight : 4.2kg

Pablo code : EL101011



Maximum usage time:
35 min per day (per
cumulative companion)

MAKITA DTS 141Z



1/4" oleo-pneumatic screwdriver The strength of an impact screwdriver, plus comfort and silence. The mechanical shock is replaced by an oleo-pneumatic system Quiet and comfortable machine: for ultra-precise tightening or use in noise-sensitive environments No loss of tightening, the torque applied to the screw is the actual tightening torque of the machine

Technical characteristics

Battery: 18V

Maximum torque: 40 Nm

Vibration value : 7m/s²

Fitting : 1/4" square

4 screwdriving modes including 1 specially for self-drilling screws

Weight : 1.5kg

Pablo code : EL113788



MAKITA DTD154RTJ



1/4" cordless impact driver

Technical characteristics

Battery: 18V

Maximum torque: 175 Nm

Vibration value : 12.5m/s²

Fitting : 1/4" square

4 screwdriving modes including 1 specially for self-drilling screws

Weight : 1.5kg

Pablo code : EL009925



Maximum usage time:
1h16 per day (per
cumulative companion)

Drill, screw, bolt

IMPACT SCREWDRIVERS

BOSCH GDR 18V-200C



1/4" cordless impact driver

Technical characteristics

Battery: 18V

Maximum torque: 200 Nm

Vibration value : 9m/s²

Fitting : 1/4" square

Weight : 1.1kg (without battery)

Pablo code : EL101524

MAKITA TD001GZ02



1/4" cordless impact driver

Technical characteristics

Battery : 40V

Maximum torque: 220 Nm

Vibration value : 10m/s²

Fitting : 1/4" square

4 speeds

6 specific modes: (2 T modes, 1 Wood mode, 3 Bolt modes)

Weight : 2kg

Pablo code : EL113787


MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Water cooling system
Instant crown stop in case of blockage



Class 1, IP 55



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Water-based dust collection system



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Hold the tool with 2 hands or mount on a column

HILTI DD30W



*Drilling of anchor holes and through holes
Water coring in heavily reinforced concrete, masonry and natural stone; fragile materials (marble, tiles, masonry, natural stone)*

Technical characteristics

Chuck type : C+
Operating mode: Hand or column drilling
Power : 1450W
Core drilling diameters: 8 to 35mm
Vibration value : 6m/s²
Weight : 7.6kg
Pablo code : EL017998



Mandatory in-depth specific training



Prevention Agreement

Optional accessories

- Drilling column DD ST 30 Code Pablo **EL018105**

Water management system

see page 77



HILTI DD150-U



Water drilling on column in concrete for passage of cable trays, ducts and installation of rails and barriers

Water hand coring for fixing large diameter dowels and rebars

Technical characteristics

Chuck type: BI+

Operating mode: Hand or column drilling

Power: 2200W

Core drilling diameters: 8 to 162 mm

Vibration value: 7m/s²

Weight: 8.2kg

Pablo code: EL100088



Mandatory in-depth specific training



Prevention Agreement

Optional accessories

- DD ST 150 U CTL column Pablo code **EL020294**

Water management system

see page 77



HILTI DD250

*Passages for ducts, pipes and cables, Ventilation openings
Coring of breaches, Drilling for installation of heating,
sanitary facilities etc. Drilling in ceilings, walls and floors
without percussion or vibration*



Technical characteristics

Chuck type : BL

Operating mode: Column mounted system

Power : 3200W

Core drilling diameter from 12 to 450mm

Vibration value : 2.5m/s²

Weight : 15.3kg - 37kg machine + column

Pablo code : EL011381

DD HD 30 drilling column Pablo code: EL017357



Mandatory in-depth
specific training



Prevention
Agreement



Tool weight
requiring special
measurements

Water management system

see page 77



HILTI DD350 - CA



*Drilling and penetrations
Blind holes for anchoring or reinforcing concrete bars
Corner holes for sawing; Openings in manholes
Grooving for cable tray installation*

Technical characteristics

Chuck type: BI (exchangeable)
Operating mode: Column mounted system
Power: 3600W
Core drilling diameters: 52 to 500mm
Vibration value: 2.5m/s²
Weight: 14.4kg - 35kg machine + column
Pablo Code: EL009209
DD HD 30 drilling column **Pablo code:** EL017357



Mandatory in-depth
specific training



Prevention
Agreement



Tool weight
requiring special
measurements

Water management system

see page 77



HILTI DD-WMS-100



A single unit for supplying cooling water as well as collecting and filtering waste water from diamond drilling systems. Keeps site clean - all sludge is collected by water recovery systems

Technical characteristics

- Filling volume :** 14 liters
- Volume of water distributed per filling:** 100 liters
- Flow rate:** 2 l/min
- Max water pressure:** 7 bar
- Hose length:** 5m
- Vibration value:** 2.5m/s²
- Weight :** 22.5kg
- Pablo code:** EL100502



Tool weight requiring special measurements

The Expendables

- Large MP5 filter bag - For DD-WMS 100 system Code Pablo **EL017312**



Core the wood

WIRED COLUMN DRILLING MACHINES

DUSS DIA 303

Nouveau!

Coring in CLT or solid wood floors for the passage of evacuation ventilation, heating pipes, etc.
Specific wood cores.
Excellent finishing quality of the borehole surface



Technical characteristics

Chuck type: G 1/2"

Operating mode: Column mounted system

Power : 2000W

Core drilling diameters: 42 to 322 mm

Vibration value: 4.2 m/s²

Weight: 6.2 kg - 21.5 kg machine + column

Pablo code: consult DISTRIMO

Drilling column BS 320 B **Code Pablo:** consult DISTRIMO



Mandatory in-depth specific training



Prevention Agreement



Tool weight requiring special measurements

Consumables and accessories

- Wide choice of consumables : consult DISTRIMO
- Wide choice of accessories : consult DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 35/40mm

Cut the wood

MINIMUM REQUIREMENTS


This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Instant disk or blade shutdown

For circular saws: protective guard and riving knife required
Dead man system, anti-restart system (except chainsaw)



Class 2, IP 20



Vibration value = 10m/s^2 maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source (except chainsaw)



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands

Cut the wood

CORDED CIRCULAR SAWS

HILTI WSC 85



Nouveau!

Circular saw combining plunge and pendulum functions for deep straight cuts up to 85 mm thick

Technical characteristics

Power : 18,00W

Cutting depth: 85mm

No-load speed: 4500 rpm

Vibration value : 2.5m/s²

Weight : 7.8kg

Pablo code : EL009765



Consumables and accessories

- Carbide saw blade 24 teeth Code Pablo **EL008449**
- Parallel stop Code Pablo **EL000404**

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 38mm

Cut the wood

CORDED CIRCULAR SAWS

HIKOKI C9BU3WBZ



Nouveau!

**AVAILABLE
FROM APRIL
2024**

Cutting and cross-sectioning in length or at an angle of soft and hard solid wood or derived materials as well as plastic & composite materials. Equipped with an electric blade brake.

Technical characteristics

Power: 2000W

Cutting depth: 86mm

No-load speed: 52,00 rpm

Vibration value : 4.1 m/s²

Weight : 7.2kg

Code Pablo : Consult Distrimo



The Expendables

- Wide choice of blades: Consult Distrimo

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 2 6/31mm

FESTOOL HK85 EB PLUS FSK420



Longitudinal and transverse cuts up to 85 mm

Miter cuts up to 60°

Cutting of planks, beams and boards

Cutting of panels, wooden insulation materials and sandwich plates

Mounted on the rail for miter cuts: rapid execution, precise angles and repeated cuts without adjustment

Safe and perfectly straight sawing with the guide rail

Technical characteristics

Power: 1900W

Blade diameter : 230mm

Cutting depth 0° to 90°: 0-86mm

Cutting depth at 45°/60°: 62/47mm

Vibration value : 1.7m/s²

Weight : 6.8kg

Delivered with FSK420 rail

Pablo code : EL126639



Consumables and accessories

- blade 230x2.5x30 W24 Wood standard Code Pablo **EL114534**
- Support rail FSK420 Code Pablo **EL121642**
- Guide rail 1400mm FS1400/2-KP Code Pablo **EL121642**

Connect the suction

- Vacuum cleaner (see page 190)
- Suction connection diameter: 27/36mm

MAFELL MT55CC



Plunge saw. Performs plunge, cross, inclined and angled cuts with extreme precision and without splintering

Technical characteristics

Power: 1400W
Cutting depth: 57 mm
No-load speed: 6250 rpm
Vibration value : 2.5m/s²
Weight : 4.5kg
Delivered with guide rule L160cm
Pablo code : EL005404



Consumables and accessories

- Carbide saw blade 24 teeth Code Pablo **EL002532**
- Carbide saw blade 48 teeth Code Pablo **EL002629**
- Guide rule L110cm Code Pablo **EL002418**
- Guide rule L160cm Code Pablo **EL003805**

Connect the suction

- Vacuum cleaner (see page 190)
- Suction connection diameter: 35mm

MAKITA DHS630RMJ



Circular saw 18 V Li-Ion Ø 165 mm

Technical characteristics

Power: 18V

Cutting depth: 66mm

Vibration value : 2.5m/s²

Weight : 3.5kg

Pablo code : EL010290



Consumables and accessories

- Wood saw blade 16 teeth Code Pablo **EL010467**
- Wood saw blade 24 teeth Code Pablo **EL010468**
- Guide rail 1400mm Code Pablo **EL121642**
- Guide rail adapter Code Pablo **EL010295**

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 22mm

Cut the wood

MITER SAWS

MAKITA LS1019L



Radial saw 260 mm. Increased precision with laser guidance

Technical characteristics

Power: 1650W

Max cutting height at 90°: 91mm

Max cutting width at 90°: 310mm

Vibration value : 2.5m/s²

Weight : 26.3kg

Pablo code : EL018361



Fixing on table or workbench required



Tool weight requiring special measurements

Consumables and accessories

- "EFFICUT" carbide blade for wood 45 teeth Code Pablo **EL117454**
- "EFFICUT" carbide blade for parquet 80 teeth Code Pablo **EL117455**
- Carbide blade for aluminum 80 teeth Code Pablo **EL117456**
- Workbench for saw LS1019 Code Pablo **EL010277**
- Articulated vertical vice Pablo Code **EL115217**
- Horizontal vice Pablo Code **EL115215**

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 38mm

FESTOOL KS60E KAPEX



For mobile use on site, Shortening of boards and panels up to 305 x 60 mm, Sawing of strips, profiles and beams up to a thickness of 60 mm, Precise adjustment of plinths and moldings - in combination with the false-square

Technical characteristics

Power: 1200W

Max cutting height at 90°: 60 mm

Max cutting width at 90°: 305mm

Vibration value : 2.5m/s²

Weight : 17.9kg

Pablo code : EL127747



Fixing on table or workbench required



Tool weight requiring special measurements

Consumables and accessories

- Carbide blade 'Code Pablo EL126031
- Carbide blade 'Code Pablo EL126032
- Carbide blade Code Pablo EL126072
- Transport chassis UG-KS 60 EL126027
- Transport chassis UG-KA-KS 60 Set EL126026

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 27/36mm bayonet

Cut the wood

MITER SAWS

FESTOOL KSC60EB KAPEX

Nouveau!



For mobile use on site, Shortening of boards and panels up to 305 x 60 mm, Sawing of strips, profiles and beams up to a thickness of 60 mm, Precise adjustment of plinths and moldings - in combination with the false-square

Technical characteristics

Power: 1200W
Max cutting height at 90°: 60 mm
Max cutting width at 90°: 305mm
Vibration value : 2.5m/s²
Weight : 17.9kg
Pablo code : EL126023



Fixing on table or workbench required



Tool weight requiring special measurements

Consumables and accessories



Machine sold without battery or charger

- Carbide blade 'Code Pablo EL126031
- Carbide blade 'Code Pablo EL126032
- Carbide blade Code Pablo EL126072
- Transport chassis UG-KS 60 EL126027
- Transport chassis UG-KA-KS 60 Set EL126026

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 27/36mm bayonet

Cut the wood

MITER SAWS

BOSCH GCM 8 SJL



Powerful and compact radial miter saw for virtually dust-free work in many applications

Technical characteristics

Power: 1600W

Max cutting height at 90°: 70 mm

Max cutting width at 90°: 312mm

Vibration value : 2.5m/s²

Weight : 17.3kg

Pablo code : EL142376



Fixing on table or workbench required



Tool weight requiring special measurements

Consumables and accessories

- Expert Wood circular saw blade 216x30x1.7mm - 24D Code Pablo **EL142383**
- Expert Wood circular saw blade 216x30x1.7mm - 48D Code Pablo **EL142384**
- Expert Aluminum circular saw blade 216x30x2mm - 66D Code Pablo **EL142382**
- Multimaterials circular saw blade 216x30x2.4mm - 64D Code Pablo **EL142379**
- Workbench for radial saw: Consult DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 35mm

Cut the wood

BATTERY-POWERED TABLE SAWS

BOSCH GCM 18V-216 D



This lightweight and compact cordless radial miter saw is easy to transport; it offers different possibilities for one-handed or two-handed transport

Technical characteristics

Battery: 18V
Max cutting height at 90°: 66 mm
Max cutting width at 90°: 305mm
Vibration value : 2.5m/s²
Weight : 16.2kg
Pablo code : EL142377



Fixing on table or workbench required



Tool weight requiring special measurements

Consumables and accessories

- Expert Wood circular saw blade 216x30x1.7mm - 24D Code Pablo **EL142383**
- Expert Wood circular saw blade 216x30x1.7mm - 48D Code Pablo **EL142384**
- Expert Aluminum circular saw blade 216x30x2mm - 66D Code Pablo **EL142382**
- Multimaterials circular saw blade 216x30x2.4mm - 64D Code Pablo **EL142379**
- Workbench for radial saw: Consult DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Connection diameter: 35mm

FESTOOL TKS 80 EBS-SET



Table saw, extendable work surface, longitudinal and angular stop. Less risk for your fingers - the sensitive sensors of the integrated SawStop -AIM technology increase safety when sawing non-conductive materials

Technical characteristics

Power: 2200W

Max cutting height at 90°: 80mm

Max cutting width at 45°: 56mm

Wide cutting up to 920mm with sliding table

Long cut up to a height of 80mm and a width of 600mm with extension

Weight : 37kg

Pablo code : EL100428



Tool weight
requiring special
measurements



Mandatory in-depth specific
training

Consumables and accessories

- Universal saw blade 254X2.4X30W40 Code Pablo **EL100430**
- Cartridge KT-TKS 80 Code Pablo **EL100429**

Connect the suction

- Vacuum cleaner (see page 190)
- Suction connection diameter: 27/36mm bayonet

VIRUTEX RZ270S



Cutting the bottom of doors, frames and plinths permanently

Technical characteristics

Power: 1300W

Cutting depth : 0 to 47mm

Minimum cutting height : 8mm

Max cutting height: 35mm

Vibration value : 2.5m/s²

Weight : 5.6kg

Pablo code : EL009675



The Expendables

- Saw blade Code Pablo **EL009928**

Connect the suction

- Vacuum cleaner (see page 190)
- Outside diameter of the connection: 25mm

Cut the wood

CHAINSAWS

HUSQVARNA 540XP MARK III



Thermal chainsaw

Technical characteristics

Power: 1.9kw

Guide: 40cm

Chain speed: 20.2m/s

Vibration value : 5.1m/s²

Weight : 4.1kg

Pablo code : EL129417



Mandatory in-depth
specific training



Prevention
Agreement



Wood
construction



DISTRIMO rental required
Wearing class 2 anti-cut PPE
is mandatory.

Consumables and accessories

- Replacement chain Code Pablo **EL129413**
- Guide 35cm Code Pablo **EL129412**
- Sharpening kit for SP21G chain Code Pablo **EL129414**

HUSQVARNA 535iXP

Nouveau!



Battery-powered chainsaw

Technical characteristics

Battery: 36V

Guide: 35cm

Chain speed : 20m/s

Vibration value: 2.8m/s²

Weight : 2.6kg without battery

Pablo Code: EL129411



Machine sold without battery or charger

FORMATION

Mandatory in-depth specific training



Prevention Agreement



DISTRIMO rental required
Wearing class 1 anti-cut PPE is mandatory.

Consumables and accessories

- BLI300 battery (individually) Code Pablo **EL113065**
- Battery charger QC500 Code Pablo **EL113066**
- Replacement chain Code Pablo **EL129413**
- Guide 35cm Code Pablo **EL129412**
- Sharpening kit for SP21G chain Code Pablo **EL129414**

Cut the wood

CARPENTER CHAIN SAW

FESTOOL SSU 200 EB-Plus



Nouveau!

Compact and handy, for cuts up to 200 mm deep

Technical characteristics

Power: 1600W

Cutting depth 90°/45°/60°: 200/140/100 mm

Chain speed : 10.60m/s

Vibration value: 3m/s²

Weight : 7.1kg

Pablo Code: EL123759



Mandatory in-depth specific training



DISTRIMO rental required
Wearing class 1 anti-cut PPE is mandatory.



Prevention Agreement

Consumables and accessories

- SC chain 3/8" universal Code Pablo **EL126408**
- SC chain 3/8" longitudinal cuts Code Pablo **EL126407**
- Spare guide Code Pablo **EL126411**
- Guide rail 1400mm Code Pablo **EL123761**

Connect the suction

- Vacuum cleaner (see page 190)
- Outside diameter of the connection: 27/36mm

Cut the wood

CARPENTER CHAIN SAW

MAFELL ZSX TWIN Ec



The framing chain saw is the practical solution for all large pieces of wood. Longitudinal cuts are possible up to a cutting depth of 400 mm!

Technical characteristics

Power: 6000W
Cutting depth 90°/45°/60°: 400/282/199 mm
Chain speed : 16.4m/s
Vibration value: 3m/s²
Weight : 24.2kg
Pablo code: EL132195



Mandatory in-depth specific training



DISTRIMO rental required
Wearing class 1 anti-cut PPE is mandatory.



Prevention Agreement



Tool weight requiring special measurements

Consumables and accessories

- Adapter for transport trolley Code Pablo EL132201
- Transport trolley Code Pablo EL132200
- Dividing knife Code Pablo EL132198
- Chain guide 400 3/8 Code Pablo EL132197
- Standard chain 3/8 Code Pablo EL132196

Connect the suction


- Vacuum cleaner (see page 190)
- Outside diameter of the connection: 58mm
- Suction adapter Code Pablo EL132203

Machining wood

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s^2 maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands

MAKITA KP0810CJ



Planing and rebating

Technical characteristics

Power: 1050W

Max depth planing width: 4mm

Max depth rebate: 25mm

Planing width: 82mm

Vibration value : 3.5m/s²

Weight : 3.4kg

Pablo code : EL005352



The Expendables

- Code Pablo iron set **EL008686**

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 38mm

FESTOOL HL850 EB-Plus



Plane and rebate near the edges. Unlimited rebate depth. Smooth surface thanks to the helical knife

Technical characteristics

Power: 850W

Max depth planing width: 3.5mm

Max depth rebate: unlimited

Planing width: 82mm

Vibration value : 2.5m/s²

Weight : 3.9kg

Pablo code : EL106949



The Expendables

- HK 82 SD tool holder for HL 850 EB-PLUS planer Code Pablo **EL117457**
- Helical knives for standard tool holders Code Pablo **EL117458**

Connect the suction

- Vacuum cleaner (see page 190)
- Outside diameter of the connection 36mm

MAKITA DKP180RTJU



Planing and rebating

Technical characteristics

Battery: 18V

Max depth planing width: 2mm

Max depth rebate: 9mm

Planing width: 82mm

Vibration value : 4.5m/s²

Weight : 3.4kg

Pablo code : EL018366



The Expendables

- Code Pablo iron set **EL008686**

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 38mm

BOSCH GHO 18V-LI



Planing and rebating

Technical characteristics

Battery: 18V

Max depth planing width: 1.6mm

Max depth rebate: 8mm

Planing width: 82mm

Vibration value : 2.5m/s²

Weight : 2.3kg

Pablo code : EL142395



The Expendables

- EL142396 iron set

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 35mm

Machining wood

TRIMMING MACHINE

BOSCH GKF 600



trimmer for precise milling of edges and edges

Technical characteristics

Power: 600W
Clamp Diameter: 6mm / 8mm
Vibration value: 4.5m/s²
Weight : 1.5kg
Pablo code : EL129162



Prevention Agreement



Mandatory in-depth specific training

The Expendables

- Cutters: Consult DISTRIMO (specific orders)

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 35mm
- Dust extraction soleplate Code Pablo **EL129228**

MAKITA RP1110CJ



Trimming and profiling

Technical characteristics

Power: 1100W
Max depth diving: 57mm
Clamp diameter: 8mm
Vibration value: 5m/s²
Weight : 3.4kg
Pablo code : EL010284



Prevention Agreement



Mandatory in-depth specific training

The Expendables

- Cutters: Consult DISTRIMO (specific orders)

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 22mm

FESTOOL OF 1400 EBQ-Plus



*Rounding, chamfering, rebating and profiling edges
Milling of rounds and cutouts with the multi-milling template
Grooving the rear walls or nesting the tongues with the guide system*

Technical characteristics

Power: 1400W

Max depth diving depth: 70mm

Clamp diameter: 6 - 12mm

Vibration value: 2.5m/s²

Weight : 4.6kg

Pablo code : EL121640 - Delivered with a box of 10 various strawberries



Prevention Agreement



Mandatory in-depth specific training

The Expendables

- Cutters: Consult DISTRIMO (specific orders)

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 27mm

MAKITA RP2300FCXJ



Trimming and profiling

Technical characteristics

- Power:** 2300W
- Max depth diving depth:** 70mm
- Clamp diameter:** 12mm
- Vibration value:** 4.5m/s²
- Weight :** 6.1kg
- Pablo code :** EL017187



Prevention Agreement



Mandatory in-depth specific training

The Expendables

- Cutters: Consult DISTRIMO (specific orders)

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 38mm

MAFELL NFU 50



The groover can be used flexibly in wood construction to carry out many milling jobs

Technical characteristics

Power: 23,00W

Maximum milling depth : 50mm

Vibration value : 2.5m/s²

Weight : 9.4kg with ruler

Pablo code : EL132191



Mandatory in-depth specific training



Prevention Agreement

The Expendables

- Reversible inserts (irons) Code Pablo EL132193
- Tool holder Code Pablo EL132192
- Iron tightening screw Code Pablo EL132194

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 58mm

VIRUTEX AB111N



*Allows you to make standard notches for N° 0-10-20
Either flat for straight assembly, or degree by degree thanks to its tilting and height-adjustable shoe*

Technical characteristics

Power: 900W
Liftable and tiltable table
Maximum milling depth : 20mm
Vibration value : 4.7m/s²
Weight : 3.2kg
Pablo code : EL017139



Mandatory in-depth specific training

The Expendables

- Blades: consult DISTRIMO (specific orders)

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 25mm

Grind, Cut, Machin metal

MINIMUM REQUIREMENTS


This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely. Outside Europe, equivalents must at least cover these requirements. The specifications below apply to all machines except angle grinders with a diameter less than 230mm: the Fein 125 (p78) grinder is the only grinder with a diameter < 230 authorized. The tools referenced in this catalog must be chosen according to need.



Instant disk shutdown

For 230mm grinders, deadman switches

Protective guard for disc tools compatible with grinding and cutting



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Dust capture system at source when cutting materials containing silica



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands



Other tools requiring precautions for use may be adapted: contact DISTRIMO

Grind, Cut, Machin metal

125 HIGH SAFETY GRINDER

FEIN PROTAGO

Meuleuse 125 TRÈS HAUTE SÉCURITÉ



Grind and cut

The safest 125 grinder on the market, compliant with BYCN specifications.

The only 125 grinder authorized by BYCN.

Technical characteristics

Batteries: 18V

Integrated LED lighting

Speed variator: 2500 to 8500rpm

Vibration value: 5m/s²

Features: Safe two-handed guidance thanks to double deadman switches, with rebound control, non-removable protective guard

Weight: 2.95kg (with battery)

Pablo Code: EL116563



Mandatory in-depth specific training



Depending on the task, other tools may be more suitable. Consult the Substitution guide for the 125 grinder [Link HERE](#)



Machine not equipped with a dust collection system. For materials containing silica, provide a risk analysis and associated means of protection

Consumables and accessories

Metal grinding and cutting housings included

- Starter set 18V 6Ah (1 charger + 2 batteries): Code Pablo **EL104850**
- Starter set 18V 5.2Ah (1 charger + 2 batteries): Pablo code **EL104851**
- FEIN ALG 80 rapid charger (Sold individually): Pablo code **EL122165**
- FEIN Li Ion High Power 18V 5.2AH battery (Sold individually): Code Pablo **EL122164**

- List of authorized consumables (order required from DISTRIMO)
 - ✓ Grinding disc 6mm Code Pablo **EL121892**
 - ✓ Flap disc Z (60) - **EL122048**; Z Curve (40) - **EL122052**; Z (120) - **EL122053**
 - ✓ Flap disc CO (50) - **EL122049**; CO (36) - **EL122050**; CO Curve (60) - **EL124654**
 - ✓ Diamond cutting disc for metals Code Pablo **EL106818**
 - ✓ Duodisc cutting disc Pferd in 1.9mm Code Pablo **EL122046**
 - ✓ Duodisc cutting disc Pferd in 2.8mm Code Pablo **EL122047**

Grind, Cut, Machin metal

THE 230 GRINDERS

HILTI AG 230 27DB



Cutting and grinding steel and metal
Concrete cutting

Technical characteristics

Power: 2700W

Max depth : 68mm

Vibration value : 6.3m/s²

Weight : 6.8kg

Delivered with: a grinding guard, a metal cutting guard and a material cutting guard with suction and a carrying bag

Pablo code : EL020240



Alternative solution to
the 125 grinder



Depending on the use, it is
imperative to use the
specific casing for the task

Consumables and accessories

- Accessories: Grinding housing, metal cutting housing, concrete cutting housing
- Consumables: Double protection casing: EL104701; Protective guard for grinding: EL117023



Protective guard for
grinding



Double protection guard for
cutting

Connect the suction

- Suction housing for concrete cutting: EL019013
- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 35/40mm



Grind, Cut, Machin metal

THE 230 GRINDERS

BOSCH GWS-30-230-PB



Nouveau!

Cutting and grinding steel and metal
Concrete cutting

Technical characteristics

Power: 2800W

Vibration value : 5m/s²

Weight : 5.9kg

Delivered with: a grinding guard, a metal cutting guard

Pablo code : EL142371



Alternative solution to
the 125 grinder



Depending on the use, it is imperative to use the specific casing for the task

Consumables and accessories

- Accessories: Grinding housing, metal cutting housing, concrete cutting housing
- Consumables: Double protection casing: EL142373



Protective guard for grinding



Double protection guard for cutting

Connect the suction

- Suction housing for concrete cutting: EL14234
- Vacuum cleaner (see page 190)
- Int / ext diameter of the fitting: 35mm



MAKITA DGA900PT4



Cutting and grinding. Ideal in space or restricted access: 1.6kg lighter than a wired one.

Technical characteristics

Batteries: 36V (2*18 V) - 5Ah

Max depth: 60mm

Vibration value : 7.5m/s²

Weight : 5.2kg (with battery)

Pablo code : EL020165



Alternative solution to the 125 grinder

Consumables and accessories

- Grinding and cutting protection cover included
- Cutting guard optional materials Code Pablo **EL020271**
- Consumables: consult DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 38mm

FEIN GSZ 8-280 PEL



Grinding and deburring in tight spaces

Technical characteristics

Power: 750W

Variable rotation speed

Vibration value : 11.4m/s²

Weight : 1.8kg

Pablo code : EL020166



Maximum usage time:
1h32 per day (per
cumulative companion)



Alternative solution to
the 125 grinder

The Expendables

- Wide choice of consumables: Consult DISTRIMO
- Line flat grinding wheel: EL116295

Grind, Cut, Machin metal

STRAIGHT GRINDERS

FEIN AGSZ 18-280 LBL AS



Cutting, sanding, deburring and milling

Technical characteristics

Batteries: 18V
Max diameter: 50mm
Integrated LED lighting
Vibration value: 13.7m/s²
Weight : 1.77kg (without battery)
Pablo code : EL143613



Maximum usage time:
1h06 per day (per
cumulative companion)



Machine sold without battery or charger



Alternative solution to
the 125 grinder

Consumables and accessories

- Wide choice of consumables: Consult DISTRIMO
- Starter set 18V - 4Ah (1 charger + 2 AMPShare batteries): Pablo code **EL127749**
- Starter set 18V - 5.5Ah (1 charger + 2 AMPShare batteries): Pablo code **EL102296**

HYPERTHERM POWERMAX30 AIR



*Cut steel, cables, sheaths, cable trays, flat iron, rails, all conductive materials
Includes built-in air compressor. Can be used anywhere with a single-phase power supply*

Technical characteristics

Cutting capacities:

- 8mm (500mm/min) - recommended
- 10mm (250mm/min) - recommended
- 16mm (125mm/min) - maximum

Internal air compressor

Total weight : 13.5kg

Torch + beam weight : 1.1kg

Pablo code : EL115386



Mandatory in-depth specific training



Alternative solution to the 125 grinder

Consumables and accessories

- Consumable kit (1 deflector, 1 protection nozzle, 7 nozzles, 7 electrode, 1 diffuser) Pablo code **EL115388**
- Transport case Code Pablo **EL115387**

Grind, Cut, Machin metal

BATTERY-POWERED IRON CUTTERS

MAKITA DSC251RT



*Cold cuts concrete bars and threaded rods without sparking and less burr
Better disc retention, cutting speed*

Technical characteristics

Batteries: 18V

Cutting of steel and threaded rods : up to 25mm

Vibration value : 2.5m/s²

Weight : 4kg (with battery)

Pablo code : EL018578



Alternative solution to
the 125 grinder



For good blade longevity: - always place
the steel against the yellow stop
- Start cutting slowly

The Expendables

- Blade for iron cutter Code Pablo EL020352

Grind, Cut, Machin metal

BATTERY-POWERED IRON CUTTERS

ATDV GR20B



*Cold cutting without sparks and less burr of concrete bars and threaded rods
3mm flush cut*

Technical characteristics

Battery: 24V 6A/h

Cutting of steel and threaded rods : up to 20mm

Vibration value : 3.266m/s²

Weight : 3.5kg

Pablo code : EL107124



Alternative solution to
the 125 grinder



For good blade longevity always adjust
the stop and contact the blade gently

The Expendables

- Blades for concrete iron cutters from 10 to 20mm Code Pablo **EL008592**
- Blades for iron cutters up to 8mm Code Pablo **EL112045**

Grind, Cut, Machin metal

CORDED IRON CUTTERS

ATDV GR20E



*Cold cutting without sparks and less burr of concrete bars and threaded rods
3mm flush cut*

Technical characteristics

Power: 1200W

Cutting of steel and threaded rods : up to 20mm

Vibration value : 5.7m/s²

Weight : 3.5kg

Pablo code : EL008528



Alternative solution to
the 125 grinder



For good blade longevity always adjust
the stop and contact the blade gently

The Expendables

- Blades for concrete iron cutters from 10 to 20mm Code Pablo **EL008592**
- Blades for iron cutters up to 8mm Code Pablo **EL112045**

FEIN BSS 2.0E



Powerful shear for processing stainless steel, spiral metal pipes and profiles.

Technical characteristics

Power: 350W

Cutting capacity:

Steel up to 400 N/mm²: 2.0 mm

Steel up to 600 N/mm²: 1.5 mm

Steel up to 800 N/mm²: 1.3 mm

Non-ferrous metals up to 250 N/mm²: 3 mm

Vibration value : 10.8m/s²

Weight : 1.7kg

Pablo code : EL113063



Alternative solution to
the 125 grinder

The Expendables

- Knives for sheet metal 400N/mm² Code Pablo **EL117472**
- Knives for sheet metal 800N/mm² Code Pablo **EL117473**
- Pair of jaws Code Pablo **EL117474**

Grind, Cut, Machin metal

METAL SHEAR

FEIN ABSS 18 1.6 E AS



Handy cordless shear, with good behavior in curves for distortion-free cuts and cuts in sheets up to 1.6 mm thick

Technical characteristics

Battery: 18V

Cutting capacity:

Steel up to 400 N/mm²: 1.6 mm

Steel up to 600 N/mm²: 1.2 mm

Steel up to 800 N/mm²: 0.8 mm

Non-ferrous metals up to 250 N/mm²: 2 mm

Vibration value : 4.6m/s²

Weight : 1.2kg (without battery)

Pablo code : EL143469



Alternative solution to the 125 grinder



Machine sold without battery or charger

The Expendables

- Knives for sheet metal 400N/mm² Code Pablo **EL104875**
- Knives for sheet metal 800N/mm² Code Pablo **EL104873**
- Pair of jaws Code Pablo **EL10872**
- Starter set 18V - 4Ah (1 charger + 2 AMPShare batteries): Pablo code **EL127749**
- Starter set 18V - 5.5Ah (1 charger + 2 AMPShare batteries): Pablo code **EL102296**

Grind, Cut, Machin metal

BATTERY NIBBLER

FEIN ABLK 18 1.6 E AS



Compact nibbler with good curve behavior for roof and facade construction. Precise cuts in trapezoidal sheet metal and corrugated sheet metal, as well as in profiles.

Technical characteristics

Batteries: 18V

Cutting speed : 1.5m/min

Cutting capacity

Steel up to 400 N/mm²: 1.6mm

Steel up to 600 N/mm²: 1.0mm

Steel up to 800 N/mm²: 0.7mm

Non-ferrous metals up to 250N/mm²: 2.5mm

Cutting width 5 mm

Vibration value : 12.1m/s²

Weight : 1.7kg (without battery)

Pablo code : EL143470



Alternative solution to the 125 grinder



Maximum usage time: 1h24 per day (per cumulative companion)



Machine sold without battery or charger

The Expendables

- Punch and die Code Pablo **EL104886**
- Starter set 18V - 4Ah (1 charger + 2 AMPShare batteries): Pablo code **EL127749**
- Starter set 18V - 5.5Ah (1 charger + 2 AMPShare batteries): Pablo code **EL102296**

FEIN BLK 1.6E



Universal nibbler for sheets, profiles, trapezoidal sheets and corrugated sheets

Technical characteristics

Power: 350W

Cutting speed : 1.9m/min

Cutting capacity

Steel up to 400 N/mm²: 1.6mm

Steel up to 600 N/mm²: 1.0mm

Steel up to 800 N/mm²: 0.7mm

Non-ferrous metals up to 250N/mm²: 2.5mm

Cutting width: 5mm

Vibration value : 8.8m/s²

Weight : 1.8kg

Pablo code : EL113061



Alternative solution to
the 125 grinder



The Expendables

- Punch and die Code Pablo **EL104886**
- Matrix Code Pablo **EL118449**
- Punch Code Pablo **EL118448**

FEIN BLK 2.0E



Very handy compact nibbler for cutting curves and angles.

Technical characteristics

Power: 350W

Cutting speed : 1m/min

Cutting capacity

Steel up to 400 N/mm²: 2mm

Steel up to 600 N/mm²: 1.5mm

Steel up to 800 N/mm²: mm

Non-ferrous metals up to 250N/mm²: 2.5mm

Cutting width: 8 mm

Vibration value: 7.3m/s²

Weight : 1.8kg

Pablo code : EL104720



Alternative solution to
the 125 grinder

The Expendables

- Matrix Code Pablo **EL117478**
- Hallmark Code Pablo **EL117479**
- Punch and die Code Pablo **EL117480**

Grind, Cut, Machin metal

WIRED NIBBLER

FEIN BLK 5



Powerful nibbler for difficult cuts.

Technical characteristics

Power: 1200W

Cutting speed : 1.3m/min

Cutting capacity

Steel up to 400 N/mm²: 5mm

Steel up to 600 N/mm²: 3.3mm

Steel up to 800 N/mm²: 2.5mm

Non-ferrous metals up to 250N/mm²: 7mm

Cutting width: 8mm

Vibration value: 10m/s²

Weight : 3.8kg

Pablo code : EL020168



Alternative solution to
the 125 grinder



Sold without box

The Expendables

- Steel sheet punch and die up to 5mm Code Pablo **EL020199**
- Aluminum sheet punch up to 7mm Code Pablo **EL115846**
- Aluminum sheet matrix up to 7mm Code Pablo **EL115848**
- Punch and die stainless steel sheet up to 3mm Code Pablo **EL115845**
- Stainless steel sheet punch up to 3mm Code Pablo **EL115847**
- Stainless steel sheet punch up to 3mm Code Pablo **EL115849**
- Machine box Code Pablo **EL020403**
- Box to put accessories Code Pablo **EL115844**

MAKITA DCS553RTJ



Special metal cutting, cold cutting without sparks

Technical characteristics

Battery: 18V - 5Ah

Cutting depth : 57.5mm

Vibration value : 2.5m/s²

Weight : 3kg

Pablo code : EL020170



Alternative solution to
the 125 grinder



The Expendables

- Metal blade Code Pablo **EL132925**
- Stainless steel blade Code Pablo **EL020848**
- Aluminum blade Code Pablo **EL117482**

FEIN MKAS 355



Safe, fast and precise sawing with the radial metal miter saw. Cold cutting without sparks and less burr

Technical characteristics

Power: 1800W

Cutting capacity : 120mm square/100mm round

Blade diameter: 355mm

Vibration value: 2.7m/s²

Weight: 24.4kg

Pablo code: EL114755



Fixing on table or workbench required



Tool weight requiring special measurements



Alternative solution to the 125 grinder

The Expendables

- Saw blade for flat steel Code Pablo **EL117459**
- Saw blade for stainless steel Code Pablo **EL117460**
- Saw blade for aluminum Code Pablo **EL117461**
- Saw blade for structural steel Code Pablo **EL117462**

MAKITA DPB182Z



Special metal cutting, cold cutting without sparks

Technical characteristics

Battery: 18V - 4Ah

Cutting capacity : 64x64mm

Blade speed : 3.2m/s

Vibration value: 2.5m/s²

Weight : 4.1kg

Pablo code : EL117733



Alternative solution to
the 125 grinder

Consumables and accessories

- Band saw blade PVC, non-ferrous metal, steel, cast iron (x5) for thickness from 2 to 3 mm
Code Pablo **EL020420**
- Band saw blade PVC, non-ferrous metal, steel, cast iron (x5) for thickness from 2 to 3 mm
Code Pablo **EL121516**

MAKITA DPB180RME



Cold cutting without sparks and less burr

Technical characteristics

Battery: 18V - 4Ah

Cutting capacity : (steel tube) 120mm

Belt speed : 84 to 162m/min

Vibration value : 2.5m/s²

Weight : 6.4kg

Pablo code : EL017248



Alternative solution to
the 125 grinder

Consumables and accessories

- Saw blade for metals and PVC Code Pablo **EL017255**

BOSCH GCB 18V-63



Cutting of common materials, for example metal and plastic tubes and aluminum profiles.

Technical characteristics

Battery: 18V

Saw blade dimensions : 733.0 x 12.7 x 0.4mm

Max cutting depth. : 63.5mm

LED lighting

Vibration value : 5.3m/s²

Weight: 4kg

Pablo code : EL121885



Alternative solution to the 125 grinder



Machine sold without battery or charger

The Expendables

- Pack of 2 5.5 Ah PROCORE batteries + BGAL 1880 CV charger Code Pablo **EL102296**
- Band saw blade 24 TPI Code Pablo **EL121886**
- Band saw blade 14 18 TPI Code Pablo **EL121887**

Grind, Cut, Machin metal

Chamferers

FEIN AKFH 18-5 AS



Powered by  BOSCH



Creation of chamfers and radii on sharp edges of flat materials, sheets and circular openings and curvilinear contours

Technical characteristics

Battery: 18V

Max. chamfer length at 45° : 5mm

Max. chamfer height at 45° : 3.5mm

Radius : 1.2/2.5mm

Chamfer angle: 45°

Vibration value : 4.5m/s²

Weight: 2.5kg (without battery)

Pablo code : EL143612



Machine sold without battery or charger



Mandatory in-depth specific training



Alternative solution to the 125 grinder



Machine delivered without guide rollers or carbide insert

Consumables and accessories

- Starter set 18V - 4Ah (1 charger + 2 AMPShare batteries) : Pablo code **EL127749**
- Starter set 18V - 5.5Ah (1 charger + 2 AMPShare batteries) : Pablo code **EL102296**
- Reversible pads SX Code Pablo **EL104905**
- Guide roller 45° chamfer Code Pablo **EL104904**
- Fixing screw for pads SX Code Pablo **EL104907**

FEIN KFH17-8R



Creation of chamfers and radii on sharp edges of flat materials, sheets and circular openings and curvilinear contours

Technical characteristics

Power: 1700W

Max. chamfer length at 45° : 8mm

Max. chamfer height at 45° : 5.7mm

Chamfer angle : 30°/37.5°/45°/60°

Radius : 2/3/4mm

Vibration value : 6.2m/s²

Weight : 4.9kg

Pablo code : EL104647



Alternative solution to the 125 grinder



Mandatory in-depth specific training



Machine delivered without guide rollers, carbide insert or insert holder

Consumables and accessories

- Inserts to choose according to the task
- Guide roller to choose according to the task
- Insert holder to choose according to the task
→ contact DISTRIMO
- Pad locking screw Code Pablo **EL104917**



Grind, Cut, Machin metal

Chamferers

FEIN KFH17-15R



Creation of chamfers and radii on sharp edges of flat materials, sheets and circular openings and curvilinear contours

Technical characteristics

Power: 1700W

Max. chamfer length at 45° : 15 mm

Max. chamfer height at 45° : 10.6mm

Chamfer angle : 30°/37.5°/45°/60°

Radius : 2/3/4mm

Vibration value : 4.3m/s²

Weight : 6.4kg

Pablo code : EL104646



Mandatory in-depth specific training



Alternative solution to the 125 grinder



Machine delivered without guide rollers, carbide insert or insert holder

Consumables and accessories:

- Inserts to choose according to the task
- Guide roller to choose according to the task
- Insert holder to choose according to the task
- contact DISTRIMO
- Pad locking screw Code Pablo EL104917



Grind, Cut, Machin metal

Threaded rod cutter

Makita DSC102 ZJ



18V threaded rod cutter up to 10mm Ideal design for use on ceilings. Clean, burr-free cut.

Technical characteristics

Battery: 18V

Cutting capacity:

threaded rod (stainless steel) M6, M8

threaded rod (steel) M8, M6, M10

Vibration value: 2.5m/s²

Weight: 3.2kg

Pablo code : EL106969



Alternative solution to
the 125 grinder



Machine sold without battery or
charger


Consumables and accessories

- Blade set M6 Code Pablo **EL117873**
- Blade set M8 Code Pablo **EL117874**
- Blade set M10 Code Pablo **EL117875**
- 18V energy pack (2 6Ah batteries + 1 DC18RC charger) Pablo code **EL111966**

Cut materials

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely. Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Dust collection system at source



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Holding the tool with 2 hands



Other tools requiring precautions for use may be adapted: contact DISTRIMO

FEIN MULTIMASTER AMM 700 MAX TOP AS



Powered by  BOSCH



For sawing in wood, metal and plastic, for removing tiles, silicone sealants and carpets, for removing adhesive residue and for removing tile adhesive

Technical characteristics

Battery: 18V

Tool holder: StarlockMax

Accessory change: QuickIN

Comes with 60 accessories

Vibration value: 2.5 to 10m/s² depending on the consumable

Weight : 1.6kg

Pablo code : EL127028



Alternative solution to the 125 grinder



The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Connect the suction

- Suction set for Fein Multimaster oscillating knife Code Pablo EL126241
- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 36/40mm

FEIN MULTIMASTER MM 700 MAX TOP



For sawing in wood, metal and plastic, for removing tiles, silicone sealants and carpets, for removing adhesive residue and for removing tile adhesive

Technical characteristics

Power: 450W

Tool holder: StarlockMax

Accessory change : QuickIN

Comes with 60 accessories

Vibration value: 2.5 to 10 m/s² depending on the consumable

Weight : 1.6kg

Pablo code : EL104644



Alternative solution to the
125 grinder



The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Connect the suction

- Suction set for Fein Multimaster oscillating knife Code Pablo EL126241
- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 36/40mm

DREMEL 4250-3/45



Cutting, grinding, precision drilling

Technical characteristics

Power: 175W

Vibration value : 14.1m/s²

Speed: from 5000 to 35000rpm

Weight : 0.60kg

Pablo code : EL121465



Alternative solution to the
125 grinder



Values vary (task, consumable, speed)

Maximum usage time:

57 minutes per day (per cumulative
companion)

The Expendables

- Large choice of consumables depending on the task: contact DISTRIMO

Cut materials

JIGSAWS

BOSCH GST 18V-155 BC



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Battery: 18V

Cutting rate: 0 to 3800 cps/min

Stroke: 26mm

Bias cuts : 0-45°

Cutting capacity : Wood 15mm, Aluminum 25mm, steel 10mm

Vibration value : 8m/s²

Weight : 2kg (without battery)

Pablo code : EL134670



Alternative solution to the 125 grinder



The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 26mm

BOSCH GST 160 BCE



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Power: 800W

Cutting rate: 800 to 3000 cps/min

Stroke: 26mm

Cutting capacity : Wood 160mm, Aluminum 20mm, steel 10mm

Vibration value : 6.5m/s²

Weight : 2.3kg

Pablo code : EL113541



Alternative solution to the 125 grinder



The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 26mm

MAKITA DJV182RTJ



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Battery: 18V - 5Ah

Cutting rate: 800 to 3500 cps/min

Stroke length: 26mm

Cutting capacity : Wood 135mm, Aluminum 20mm, steel 10mm

Vibration value : 7m/s²

Weight : 2.6kg

Pablo code : EL018419



Alternative solution to the 125 grinder



The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 22mm

Cut materials

BATTERY-POWERED SABSAWS

MAKITA DJR186RTE



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Battery: 18V - 5Ah

Cutting capacity: 255mm wood / 130mm steel tube

Stroke: 32mm

Vibration value: 13m/s²

Weight: 3.8kg

Pablo code: EL010288



Prevention Agreement



Mandatory in-depth specific training



DISTRIMO rental required



Alternative solution to the 125 grinder



Maximum usage time: 1h11 per day (per cumulative companion)

The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

Cut materials

BATTERY-POWERED SABSAWS

BOSCH GSA 18V 32



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Battery: 18V

2 speeds

Pendulum movement : 3 cutting modes

Cutting capacity: 230mm wood / 175mm steel tube / 20mm steel

Stroke: 32mm

Vibration value : 13m/s²

Weight : 4kg

Pablo code : EL113539



Prevention Agreement



Mandatory in-depth specific training



DISTRIMO rental required



Alternative solution to the 125 grinder



Maximum usage time: 1h11 per day (per cumulative companion)

The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

MAKITA JR3070CTH



Wide variety of cutting materials: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

- Power:** 1510W
- Cutting capacity:** 255mm wood / 130mm steel tube
- Stroke:** 32mm
- Vibration value :** 10.5m/s²
- Weight :** 4.6kg
- Pablo code :** EL010289



Prevention Agreement



Mandatory in-depth specific training



DISTRIMO rental required



Alternative solution to the 125 grinder

The Expendables

Large choice of consumables depending on the task: contact DISTRIMO

HIKOKI CR 13VBY-WSZ



Wide variety of material cuts: Wood and wood composites, metals and metal alloys, plastics

Technical characteristics

Power: 1150W

Variable speeds with 5 presets

Adjustable pendulum movement

Cutting capacity: 300mm wood / 19mm steel

Vibration value: 7.5m/s²

Weight : 4.4kg

Pablo code : EL113544



Mandatory in-depth specific training



Prevention Agreement



Alternative solution to the 125 grinder



DISTRIMO rental required

The Expendables

- Large choice of consumables depending on the task: contact DISTRIMO

HUSQVARNA K1 PACE



Nouveau!

The high-performance K 1 PACE battery-powered cutting machine offers the power and performance you expect from equivalent thermal cutters. Suitable for concrete pipes, concrete garden slabs, concrete blocks, etc.

Technical characteristics

- Battery:** 93.6V
- Disc diameter:** 361mm
- Maximum cutting depth:** 145mm
- Vibration value:** 2.2m/s²
- Weight :** 7.4kg
- Pablo code :** EL126644



Machine sold without battery or charger

Mandatory in-depth specific training



Connection to a water supply required



Alternative solution to the 125 grinder



Consumables and accessories

- B750X PACE battery individually Code Pablo **EL126645**
- C900X PACE Charger Code Pablo **EL126646**
- 14L autonomous pressure water tank WT2GO Code Pablo **EL106211**
- Discs: contact DISTRIMO

HUSQVARNA K770 smart Guard



SmartGuard technology, this extended disc guard reduces the risk of accidents and kickback,

Technical characteristics

Power: 3.7kW

Disc diameter: 350mm

Maximum cutting depth : 125mm

Vibration value : 2.1m/s²

Weight : 11.1kg

Pablo code : EL142588



Mandatory in-depth
specific training



Prevention
Agreement



Connection to a water
supply required

Consumables and accessories

- Maintenance kit (spark plug, filter, belt) Code Pablo **EL106210**
- Floor cutting trolley KV7 Code Pablo **EL106212**
- 14L autonomous pressure water tank WT2GO Code Pablo **EL106211**
- Discs: contact DISTRIMO

HUSQVARNA K535i



A lightweight, ergonomic battery-powered cutting machine with low vibration. Versatile machine for landscaping work. Suitable for cutting exterior concrete slabs, granite as well as tiles and tiling.

Technical characteristics

Battery: 36V

Disc diameter: 230mm

Maximum cutting depth: 76mm

Vibration value: 2.5m/s²

Weight : 3.5kg

Delivered with 1 TACTI-CUT S35 Silence disc

Pablo code : EL113064



Machine sold without battery or charger

Mandatory in-depth specific training



Connection to a water supply required



Alternative solution to the 125 grinder

Consumables and accessories

- BLI 300 battery for Husqvarna K535i code cutter Pablo **EL113065**
- Husqvarna QC500 500W battery charger Code Pablo **EL113066**
- 14L autonomous pressure water tank WT2GO Code Pablo **EL106211**
- Discs: contact DISTRIMO

HUSQVARNA K970 Chain



Husqvarna K 970 Chain thermal cutter is characterized by a unique cutting depth of 390 mm. It can also make openings as small as 11 x 11 cm, making it perfect for irregularly shaped cutouts. It is ideal for rectifying window and door openings and for corners without overlap.

Technical characteristics

Power: 4.8kW
Cutting depth: 400mm
Saw kerf width: 5.7mm
Vibration value : 4.7m/s²
Weight : 9.7kg
Pablo code : EL106213 (without guide without chain)



Prevention Agreement



Mandatory in-depth specific training



Connection to a major water supply required

Consumables and accessories

- Chain guide 450mm Code Pablo **EL106214**
- VARI CHAIN C45 chain (hard to soft concrete) Code Pablo **EL106215**
- Autonomous 40 L water tank (with 1 battery and 1 charger) Code Pablo **EL107125**

ATDV 680ES



Thermal cutter perfectly suited for cutting reinforced concrete, at right angles and without dust.

Technical characteristics

Power: 5.7 hp

Cutting depth: 300mm

Vibration value: 8.5m/s²

Weight : 9.5kg

Pablo code : EL112029



Prevention
Agreement



Mandatory in-depth
specific training



Connection to a major water
supply required

Consumables and accessories

- Chain guide 300mm Code Pablo **EL107128**
- Chain 29 segments Code Pablo **EL107129**
- F3 BRICK chain for bricks & concrete blocks: Pablo code **EL112032**
- F3 PREMIUM chain for reinforced concrete: Pablo code **EL112030**
- Autonomous 40 L water tank (with 1 battery and 1 charger) Code Pablo **EL107125**

ATDV E-SAW-30



Electric cutting machine, designed for cutting reinforced concrete and other construction materials.

Technical characteristics

Power: 3200W

Cutting depth: 300mm

Vibration value : 4.3m/s²

Weight : 9kg

Pablo code : EL112038



Prevention
Agreement



Mandatory in-depth
specific training



Connection to a major
water supply required

Consumables and accessories

- Chain guide 300mm Code Pablo **EL117487**
- Chain 29 segments Code Pablo **EL117488**
- Autonomous 40 L water tank (with 1 battery and 1 charger) Code Pablo **EL107125**

SPIT D90



Embedding tubes, ducts and pipes in all types of support materials, such as concrete, stone, hollow and solid brick, plaster tile, cellular concrete

Technical characteristics

Power: 2500W

Cutting width: 7 to 47mm

Grooving distances: 23mm in front - 28mm on the side, to work close to the edges

Vibration value : 4.3m/s²

Weight : 6.5kg

Pablo code : EL007754



Alternative solution to the 125 grinder



SYSTEME D'ASPIRATION OBLIGATOIRE

The Expendables

Pack of 2 universal XTREME discs Ø150 Code Pablo **EL007586**

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 40mm



Cut materials

GROOVER

SPIT D60



Nouveau!

Lightweight and compact wall chaser for versatile, dust-free use

Technical characteristics

Power: 1600W

Cutting width: 7 to 35mm

Grooving distances: 24mm in front - 26mm on the side, to work close to the edges

Vibration value : 3.6m/s²

Weight : 4.6kg

Pablo code : EL007753



Alternative solution to the 125 grinder



SYSTEME D'ASPIRATION OBLIGATOIRE

The Expendables

Pack of 2 universal XTREME discs Ø140 Code Pablo **EL007576**

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 40mm



EXACT PIPECUT P400



The Exact tube cutter allows the cutting and chamfering of plastic tubes (PE, PP, PVC, etc.)

Technical characteristics

Power: 1010W

Cutting capacity : diameter from 100 mm to 400 mm

Maximum pipe thickness: 25 mm in section, 22 mm in chamfered section

Sold with 3 rollers

Vibration value: 2.6m/s²

Weight : 6kg

Pablo code : EL009771



Alternative solution to
the 125 grinder

The Expendables

- Cutting disc TCT P150 Code Pablo **EL010303**
- Cutting and chamfering disc Code Pablo **EL118285**

EXACT PIPECUT V800



The Exact tube cutter allows the cutting of spiral sheath

Technical characteristics

Power: 1010W
Cutting capacity : diam. from 75mm to 800mm
Maximum pipe thickness: 6mm
Vibration value: 2.2m/s²
Weight : 6.0kg
Code Pablo : Consult Distrimo



Alternative solution to
the 125 grinder



Sold without rollers

Consumables and accessories

- Cutting disc V155 Code Pablo EL010305
- Code Pablo EL105993 Roller Skates

EXACT PIPECUT 360 PRO SERIES



Nouveau!

The Exact pipe cutter allows you to cut metal pipes

Technical characteristics

Power: 2500W

Cutting capacity : diameter from 75mm to 360mm

Maximum pipe thickness: 20mm

Vibration value: 3.2m/s²

Weight : 17.5kg

Pablo code : EL113082



Alternative solution to the 125 grinder



Mandatory in-depth specific training



Tool weight requiring special measurements

Consumables and accessories

- Cutting disc: Contact Distrimo

MAKITA CC301D DSAE



Handy and compact, the ideal tool for tiling

Technical characteristics

Battery: 12V

Cutting capacity at 90°: 25.5mm

Disc diameter: 85mm

Water tank: 500ml

Vibration value: 2.5m/s²

Weight : 1.8kg

Pablo code : EL112189



Alternative solution to
the 125 grinder



Mandatory water
supply

The Expendables

- Special diamond blade for tiling Code Pablo **EL126320**
- Special diamond blade for tiles & glass Code Pablo **EL115478**

SIDAMO DIAMINIPRO 180



Wet tiling saw, Cast aluminum table with water recovery Tilting surface allowing right angle and bevel cuts (22.5° and 45°) Water tank for cooling the disc

Technical characteristics

Power: 750W

90° cutting capacities: Length 457mm Height 30mm

Cutting capacities 45°: Length 457mm Height 12mm

Water tank: 2.5l

Vibration value: 2.5m/s²

Weight : 14.4kg

Pablo code : EL106821



Alternative solution to
the 125 grinder



It is essential to fill the
water tank

Consumables and accessories

Diamond blade PRO CERAM-E D. 180 Code Pablo **EL106822**

Cut materials

CUTTING TILES

IQ POWER TOOL: IQ228CYCLONE



Nouveau!

Table saw with fully integrated vacuum technology, this innovative design combines the power of a high-end table saw with a powerful cyclonic vacuum extracting 99.5% of dust, Fast, clean, efficient and precise cutting, without water, without mud, while keeping the disc cool

Technical characteristics

Power: 1800W

Cutting capacities: thickness 25mm, length 609mm

Weight : 16.5kg

Pablo code : EL143448



Alternative solution to the 125 grinder



Tool weight requiring special measurements

Consumables and accessories

- Diamond blade D180mm orange universal Code Pablo **EL143450**
- Diamond blade D180mm gray hard materials Code Pablo **EL143451**
- Miter cut support Code Pablo **EL143449**

IQ POWER TOOL: iQTS244-230V



A dust-free tiler's table saw that cuts cleanly, efficiently and precisely, without water, without mud, while keeping the blade cool.

Technical characteristics

Power: 2000W

Cutting capacities: thickness 25mm, length 610mm (more than 1200mm with extension)

Bevel cuts at 22.5° and 45° in 19mm thickness

Weight : 42 kg

Pablo code : EL107121



Alternative solution to the 125 grinder



Tool weight requiring special measurements

Consumables and accessories

- Diamond blade 255mm Code Pablo **EL107123**
- Raising trestle Code Pablo **EL107122**
- Extension table For cutting large format material with a length of 1200mm or more Pablo code **EL107724**
- Miter cut support Code Pablo **EL107725**

Cut materials

CUTTING OF MASONRY ELEMENT

IQ POWER TOOL: IQMS362



With fully integrated vacuum technology, the iQMS362 is a true revolution in masonry table saws. Combining the power of a high-end table saw with a powerful cyclonic vacuum, Today, it is the only table saw that cuts without water, without dust, cleanly, efficiently, precisely while keeping the blade cool.

Technical characteristics

Power: 2300W
Cutting capacities: thickness 140mm, length 610mm
Weight : 68kg
Pablo code : EL127023



Alternative solution to the 125 grinder



Weight of tool requires special measures



Mandatory in-depth specific training

Consumables and accessories

- Universal diamond blade 420mm Code Pablo **EL127024**
- Diamond disc abrasive materials 420mm Code Pablo **EL127025**
- Diamond blade hard materials 420mm Code Pablo **EL127026**
- Diamond disc sandstone slab 420mm Code Pablo **EL127027**

DEWALT DCS397T2



Cutting of high density bricks and/or insulation materials such as fibirstyrene

Technical characteristics

Battery: 54V-6Ah

Blade: 43cm

Vibration value: 4.1m/s²

Weight : 5.6kg

Pablo code : EL018362



Prevention
Agreement

The Expendables

- Special hollow brick blade 450mm Code Pablo **EL020299**
- Special cellular concrete blade 450mm Code Pablo **EL020301**

FESTOOL ISC 240 HPC 4.0 EBI-Plus



Nouveau!

Cutting tools perfectly suited for precise and rapid cuts in PUR insulating materials, mineral or soft natural fibers

Technical characteristics

Battery: 18V 4Ah

Cutting depth: 240mm or 350mm

Vibration value: 8.5m/s²

Weight : 1.4kg

Pablo code : EL134325



Prevention
Agreement



Mandatory in-depth
specific training

The Expendables

- Flexible insulating tool 240mm Code Pablo EL134327
- Flexible insulating tool 350mm Code Pablo EL134330
- Rigid insulating tool 240mm Code Pablo EL134328
- Rigid insulating tool 350mm Code Pablo EL134332

- Special flexible insulating blade 240mm Code Pablo EL134326
- Special flexible insulating blade 350mm Code Pablo EL134331
- Special rigid insulating blade 240mm Code Pablo EL134329
- Special rigid insulating blade 350mm Code Pablo EL134333

Connect the suction

- Vacuum cleaner (see page 190)
- Outer diameter of fitting: 27/36mm

Cut materials

CUTTING OF FLEXIBLE MATERIALS

MAKITA CP100DWA



Designed for cutting flexible materials: carpet, thin fabrics, cardboard up to 6 mm thick. Very good visibility of the cutting line.

Technical characteristics

Battery: 12V-2Ah

Cutting thickness: up to 6mm

Vibration value: 2.5m/s²

Weight : 0.88kg

Pablo code : EL020872

The Expendables

- Blade for universal cutter Code Pablo **EL115482**

MAKITA DSD180Z



Dust-free cutting of Placoplatre panels. Reservations, pickups, etc. Ideal ceiling cutout

Technical characteristics

Battery: 18V - 5Ah

Cutting capacity: 30mm plasterboard

Vibration value: 5m/s²

Weight: 1.9kg

Pablo Code: EL020184



The Expendables

- Blade for special plasterboard saw - 55mm x 18mm x 0.55mm Code Pablo **EL115285**
- Suction housing for plasterboard saw Code Pablo **EL118452**
- MAKITA suction adapter Ø22mm Code Pablo **EL118454**

Connect the suction

- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 22mm/25mm

Cut materials

PLACO CUTTING

HILTI SCO 6-22

NURON



Cordless, carbon-free drywall cutting tool for fast, clean and precise cuts in thin boards and sheet metal

Technical characteristics

Battery : 21.6V

Vibration value : 2.5m/s²

Weight: 1.4kg (without battery)

Pablo Code: EL126996



Machine vendue sans batterie ni chargeur

The Expendables

- Spiral bit SCOB D 1/8 Code Pablo **EL920038**
- Suction connection tip Code Pablo **EL118287**
- Battery Nuron B 22-85 Li-ion 4.0Ah **EL126966**
- Nuron C 6-22 230V rapid battery charger Code Pablo **EL126971**

Connect the suction

- Vacuum cleaner (see page 190)
- Requires purchase of suction fitting
- Int / ext diameter of the connection: 35/42mm



Cut materials

PLACO CUTTING

BOSCH GCU 18V-30



Drywall cutting tool, cordless for fast, clean and precise cuts,

Technical characteristics

Battery : 18V

Vibration value : 4.4m/s²

Weight: 1.3kg (without battery)

Pablo Code: EL142397



The Expendables

- Wide choice of consumables: Consult Distrimo

Connect the suction

- Vacuum cleaner (see page 190)
- Int / ext diameter of the fitting: 35mm

FESTOOL MX 1000 RE EF HS2



Mix any type of material without any dust. MX suction device, which simply attaches to the edge of the bucket, Flexible height adjustment device ErgoFix for an ergonomic posture

Technical characteristics

Wired

Power : 1020W

No-load rotation : 360 or 630/- min⁻¹

Mixing volume : 40.00 l

Vibration value : 2.5 m/s²

Weight : 4.6kg

Pablo Code: EL114539



The Expendables

- HS 2 mixing rod 120x600 M14 (viscous mixture) Code Pablo **EL114540**
- Mixing rod HS 3 120x600 R M14 (viscous mixture) Code Pablo **EL114541**
- HS 3 mixing rod 120x600 L M14 (liquid mixture) Code Pablo **EL129072**

Connect the suction


- Vacuum cleaner (see page 190)
- Int / ext diameter of the connection: 27/36mm

Nail, ligate, strap

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s² maximum = maximum cumulative exposure 2h/d per companion



Double firing safety for nailers



Value \leq 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle

Nail, ligate, strap

NAILERS



Nailers are offered based on the task, materials and whether they meet our minimum requirements. Contact the **DISTRIMO** power tool representative



Mandatory in-depth specific training

Nail, ligate, strap

BATTERY-POWERED GAS NAILERS

SPIT IM90Xi



The most reliable, ergonomic and efficient multi-application autonomous nailer on the market, for carpenters and roofers, Covers all applications on construction sites: framing, roofing, MOB and also cladding, steel tiles, formwork, flooring

Technical characteristics

Battery : 7.2V

Nails: 34° nails in paper strip 50 to 90mm

Power: 105J

Vibration value: 3.9m/s²

Weight: 3.6kg

Pablo code: EL114426



The Expendables

- Large choice of consumables depending on the task: contact DISTRIMO

Nail, ligate, strap

BATTERY-POWERED GAS NAILERS

SPIT PPN50Xi



The most efficient, safe and comfortable autonomous nailing system for metal connectors on wood: Truss brackets, Framing shoes, Assembly brackets, Corner connectors, Connection plates, Bracing strips 34° nails in paper strip 35 to 50mm

Technical characteristics

Battery : 7.2V

Nails: 34° nails in paper strip 35 to 50mm

Power: 95J

Vibration value: 4.3m/s²

Weight: 3.8kg

Pablo code : EL114425

The Expendables

- Large choice of consumables depending on the task: contact DISTRIMO

Nail, ligate, strap

BATTERY-POWERED NAILERS

SPIT PULSA P27E



Nouveau!

autonomous multi-material nailer for electricians and plumbers. Fixing ducts, pipes, tubes, cables and wiring accessories. Direct fixing of electrical trunking and junction boxes. Floor, wall and ceiling in: standard and prestressed concrete, brick and steel.

Technical characteristics

Battery : 7.2V

Fixing range: 15 to 27mm

Power: 95J

Vibration value: 4.9m/s²

Weight: 3.8kg

Pablo code : EL128871

The Expendables

- Large choice of consumables depending on the task: contact DISTRIMO

MAX RB611T



Ideal for ligating plumbing pipes and embeddings. 5 times faster than a ligature done manually.

Technical characteristics

Battery : 14.4V

Ligatures range: 16mm x 16mm to 3mm x 16mm x 16mm

Vibration value: 0.5m/s²

Weight: 2.5kg

Pablo code : EL117560

The Expendables

Binding wire Code Pablo **EL114754**

Nail, ligate, strap

LIGATURE GUNS

MAX RB441T

Nouveau!



Ideal for ligating plumbing pipes and embeddings. 5 times faster than a ligature done manually.

Technical characteristics

Battery : 14.4V

Ligatures range: 10mm x 10mm – 22mm x 22mm to 13mm x 13mm x 16mm x 16mm

Vibration value: 0.5m/s²

Weight: 2.5kg

Pablo code : EL129074

The Expendables

Binding wire Code Pablo **EL114754**

Tool extension for ligating at eye level Code Pablo **EL003861**

MAX RB398



Use with extension

Binding of irons. 5 times faster than a ligature done manually

Technical characteristics

Battery : 14.4V

Ligature range : 10 x 10 - 16 x 19 - 13 x 13 x 13 x 13mm

Vibration value : 1.9 m/s²

Weight : 2.4kg

Pablo Code: EL010018

The Expendables

- Binding wire Code Pablo **EL005788**
- Tool extension for ligating at eye level Code Pablo **EL003861**

MAX 218



Use with extension

Binding of irons. 5 times faster than a ligature done manually

Technical characteristics

Battery : 14.4V

Ligature range : 10x10 mm

Vibration value: 1.9 m/s²

Weight: 2.4kg

Pablo code: EL009996

The Expendables

- Binding wire Code Pablo **EL005788**
- Tool extension for ligating at eye level Code Pablo **EL003861**

MAX RB401-TE



Binding of irons. Work at eye level. 5 times faster than a ligature done manually

Technical characteristics

Ligature range : 10 x 10 - 20 x 20 - 13 x 13 x 13 x 13 mm

Vibration value : 1.7 m/s²

Weight: 4.6kg with battery

Pablo Code: EL114753

The Expendables

- Binding wire Code Pablo **EL114754**

MAKITA DTR180ZJ



Binding of irons. 5 times faster than a ligature done manually

Technical characteristics

Battery : 18V

Ligation range: 10x10 - 16x16 mm - 10x10x10 -13x13x16 - 13x13x13x13mm

Vibration value: 1.7 m/s²

Weight: 2.6kg

Pablo code: EL020714



Machine sold without battery or charger

Consumables and accessories

- Binding wire Code Pablo **EL020715**
- Tool extension for ligating at eye level Code Pablo **EL115483**
- 18V energy PACK (2 6Ah batteries + 1 DC18RC charger) Pablo code **EL111966**

FROMM



Circle

Technical characteristics

Battery : 18V

Dimensions of the strap : Width: 8.0 - 13.0 mm **Thickness:** 0.35 - 0.8 mm

Weight : 3.4kg

Pablo code: EL020181


The Expendables

- Pablo Code Unwinder **EL020182**
- Strap Code Pablo **EL020183**

Crimping and cutting cables

MINIMUM REQUIREMENTS

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely. Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Vibration value = 10m/s^2 maximum = maximum cumulative exposure 2h/d per companion



Emergency stop button or Dead Man System
Return of the jaws



Value ≤ 80 dB (A), with hearing protection, over 8 hours



Non-slip tool handle



Electronic control of the crimping cycle with automatic adaptation of the force exerted
Modular: to work with inserts or mini-clamps



Depending on the task, other tools and accessories may be more suitable. Contact **DISTRIMO**.

Crimping and cutting cables

CABLE CUTTER

KLAUKE ES 65-CFB



For cutting copper and aluminum cables with light steel reinforcement

Technical characteristics

Battery: 18V Bosch
Maximum cut: Ø 65mm
Vibration value : 2.5m/s²
Weight: 6.3kg
Pablo Code: EL017138

The Expendables

Replacement blade Code Pablo **EL118296**

Crimping and cutting cables

CABLE CUTTER

KLAUKE ESG65RMCCFM



Guillotine cable cutter Ø65mm - remote cutter with remote control for the BT network

Technical characteristics

Battery: 18V Makita
Cutting capacity: 65mm
Vibration value: 2.5m/s²
Weight: 6.2kg
Pablo Code: EL114611

The Expendables

- Fixed blade 65mm Code Pablo **EL118298**
- Mobile blade 65mm Code Pablo **EL118299**
- Remote control for cable cutters Code Pablo **EL118302**

Crimping and cutting cables

CABLE CUTTER

KLAUKE ESG105RMCCFM



Guillotine cable cutter Ø105mm - remote cutter with remote control for the BT network

Technical characteristics

Battery : 18V Makita
Cutting capacity: 105mm
Vibration value: 2.5m/s²
Weight: 10.1 kg
Pablo code: EL114612

The Expendables

- Fixed blade 105mm Code Pablo **EL118300**
- Mobile blade 105mm Code Pablo **EL118301**
- Remote control for cable cutters Code Pablo **EL118302**

Crimping and cutting cables

CABLE CUTTER

KLAUKE EBS 8 CFB



Cordless hydraulic bolt cutters Ø 8 mm. For cutting cable trays, bolts and medium hard steel wires

Technical characteristics

Battery: 18V Bosch
Cutting force : 15kN
Maximum cut: Ø 8mm
Vibration value: 2.5 m/s²
Weight: 1.55kg
Pablo Code: EL106054

The Expendables

Replacement blade Code Pablo EL118297

Crimping and cutting cables

CABLE CUTTER

KLAUKE EBS 12 ML



Cordless hydraulic bolt cutters Ø 12 mm. For cutting cable trays, bolts and medium hard steel wires

Technical characteristics

Battery: 18V Bosch
Cutting force : 45kN
Maximum cut: Ø 12mm
Vibration value: 2.5 m/s²
Weight: 2.1kg
Pablo code: EL008315

The Expendables

Replacement blade Code Pablo **EL100661**

Crimping and cutting cables

PLUMBING CRIMPERS

REMS MINI PRESS 22V

Nouveau!



For crimping up to \varnothing 40 mm.
Universal, very small, very light, ultra-fast and super balanced!

Technical characteristics

Battery : 22V

Ability :

- Copper: \varnothing 12 - 35mm.
- Stainless steel: \varnothing 12 - 35mm.
- PER, PEX: \varnothing 12 - 32mm (inserts).
- Multilayer: \varnothing 12 - 40mm (inserts)
- Electro-galvanized steel (or carbon steel): \varnothing 12 - 35mm.

Crimping force : 22kN

Vibration value : 2.5m/s²

Weight: 2.50 kg

Pablo code: EL143439

Delivered without crimping pliers

The Expendables

A multitude of pliers and inserts available: Contact DISTRIMO

Crimping and cutting cables

ELECTRICIAN CRIMPERS

KLAUKE EK 35/4ML



Hydraulic battery crimping tool 6 - 150 mm².
Series 4 Interchangeable Crimp Inserts, Narrow Crimp

Technical characteristics

Battery: 18V Bosch
Capacity: 6 to 150mm²
Crimping force: 35kN
Vibration value: 2.5 m/s²
Weight : 2.4kg
Pablo code : EL020886



Sold without matrix

Consumables and accessories

- Copper matrices 6,10,16,25,35,50,70,95,120,150, mm²: contact DISTRIMO
- Alu/copper matrices 35/50, 70/95/120mm²: contact DISTRIMO

Crimping and cutting cables

ELECTRICIAN CRIMPERS

KLAUKE EKM 60UNV



Universal battery-operated tool 6 - 300 mm².

One head for pressing, cutting and punching - One tool for everything. Ideal for the assembly area, as all common tasks can be carried out with just one tool

Technical characteristics

Battery: 18V Bosch

Capacity: 6 to 300 mm²

Crimping force: 60kN

Cutting capacity: 40mm

Punching capacity: Round diam 60, square 92x92mm

Vibration value: 2.5 m/s²

Weight : 3kg

Pablo code : EL114554



Sold without matrix

Consumables and accessories

- Copper matrices 6,10,16,25,35,50,70,95,120,150,185,240,300mm²: contact DISTRIMO
- Alu/copper matrices 35/50, 70/95/120, 150/185/240, 300, mm²: contact DISTRIMO
- Hallmarks: contact DISTRIMO
- Cutting pliers: contact DISTRIMO

Crimping and cutting cables

ELECTRICIAN CRIMPERS

KLAUKE EK 50/5 CFB



Hydraulic battery crimping tool 6 - 240 mm.
Series 5 Interchangeable Crimping Inserts

Technical characteristics

Battery: 18V Bosch
Capacity: 6 to 240 mm²
Crimping force: 50kN
Vibration value: 2.5 m/s²
Weight : 2kg
Pablo code : EL114599



Sold without matrix

Consumables and accessories

- Copper matrices 120/4, 35/6, 50/10, 70/16, 95/25, 150, 185, 240 mm²: contact DISTRIMO
- Alu/copper matrices 35/50, 70/95/120, 150/185/240, 300, mm²: contact DISTRIMO

Crimping and cutting cables

ELECTRICIAN CRIMPERS

KLAUKE EK 120UCFB



Hydraulic battery crimping tool 16 - 400 mm.
13 Series Interchangeable Crimp Inserts, Wide Crimp

Technical characteristics

Battery: 18V Bosch
Capacity: 16 to 400 mm²
Crimping force: 120kN
Vibration value: 2.5 m/s²
Weight: 6.2kg
Pablo code : EL010824




Sold without matrix

Consumables and accessories

- Copper matrices 6,10,16,25,35,50,70,95,120,150,185,240,300,400 mm²: contact DISTRIMO
- Alu/copper dies 35/50, 70/95/120, 150/185/240, 300, 16/25/35, 50/70/95, 120/150, 185/240, 16/25/35, 50/ 70/95, 120/150, 185/240mm²: contact DISTRIMO
- Punch holder PP120 Code Pablo **EL114590**

This referencing meets the minimum requirements below and meets the needs of operational staff. It must be respected absolutely.

Outside Europe, equivalents must at least cover these requirements.



Class 2, IP 20



Class M or H (exception for the p190 portable vacuum cleaner, with prior risk analysis and agreement from the Prevention department)



Tips adaptable to different power tools, telescopic tube
Automatic unclogging (except portable and class H)



Value \leq 80 dB (A), with hearing protection, over 8 hours

MAKITA DVC265ZXU



Vacuum cleaner not classified L/M/H requiring prior risk analysis.
HEPA filter removes particles with a 99.75% efficiency rating
Standalone and mobile solution for connection to a machine

Technical characteristics

Suction class : unclassified

Battery: 36V (2x18V)

Dust capacity: 2 Liters

Vibration value : 2.5m/s²

Weight : 4.5kg with batteries

Suction pipe : Diameter 28mm

Delivered with adapters: Diameters 22 and 24

Pablo code : EL121611



Machine sold without battery or charger



Prevention
Agreement



Requires a risk analysis (type of dust/filtration capacity) with the Direction Prevention before use

Consumables and accessories

- Filter paper dust bag for DVC260 vacuum cleaner (per 10) Code Pablo EL115488
- HEPA filter for vacuum cleaner DVC260 Code Pablo EL115487
- Adapter diam 22 Code Pablo EL118454
- Adapter diam 24 Code Pablo EL118455
- Adapter diam 38 Code Pablo EL118456



HILTI VC 10M-22

NURON



Nouveau!



High Suction Wet/Dry Cordless Vacuum Cleaner with Optional Backpack for Dust Extraction

Technical characteristics

Suction class : M

Battery: 21.6V

Dust capacity: 7Kg

Water capacity: 5 liters

Automatic unclogging: Yes

Max depression: 17kPa

Vibration value : 2.5m/s²

Weight : 6kg (without battery)

Suction pipe : Diameter 32mm

Pablo code : EL127004



Machine sold without battery or charger



Vacuum cleaner for wood dust. Not suitable for dust containing silica (concrete, etc.)

Consumables and accessories

- Microfiber dust bag (per 10) Code Pablo **EL127012**
- Plastic dust bag (water and dry) (per 10) Code Pablo **EL133822**
- Filter VC 4X-22/10/140-2-22 UNIV Code Pablo **EL127011**

FESTOOL CTM 26E AC CLEANTEC



With cyclone filter



Smooth hose and optimized SYS-Dock with cable winding and automatic unclogging function. High suction power thanks to a compact high-performance turbine. For dust class M

Technical characteristics

Suction class: M

Dust capacity: 24 liters with bag

Automatic unclogging: Yes

Max vacuum: 24 kPa

Weight : 14.7kg

Suction hose: Inner diameter 27mm (bayonet), outer diameter 36mm

Pablo code : EL117494



Vacuum cleaner for wood dust. Not suitable for dust containing silica (concrete, etc.)

Consumables and accessories

- Suction fitting adapter: **EL126240**
- Remote control CT-F I/M-Set Code Pablo **EL114536**
- Main filter HF-CT 26/36/48 HP Code Pablo **EL117495**
- Filter bag SELF-CLEAN SC FIS-CT 26/5 Code Pablo **EL117496**
- Cyclonic filter CT CT-VA-20 Code Pablo **EL114537**
- Waste disposal bag ENS-VA-20/10 Code Pablo **EL115490**

HILTI VC 20M-X



Compact universal vacuum cleaner with automatic filter cleaning for collecting dry and occasionally wet dust - class M

Technical characteristics

Suction class: M

Dust capacity: 15kg

Water capacity: 9 liters

Automatic unclogging: Yes

Max depression: 24.5kPa

Vibration value: 2.5m/s²

Weight : 11kg

Delivered with 2 in 1 click and universal suction connection

Pablo code : EL101069



Vacuum cleaner for wood dust. Not suitable for dust containing silica (concrete, etc.)

Consumables and accessories

- Dust bag for VC 20-UM-X (Pack of 10 units) Code Pablo **EL101080**
- Filter for dust applications only Code Pablo **EL101084**
- High performance vacuum cleaner filters (wet and dry applications) Code Pablo **EL101081**
- Universal vacuum cleaner filters for dry and wet applications Code Pablo **EL101079**
- 36mm conical adapter Code Pablo **EL118329**
- DGH & DCH-SL adapter (connection to any machine outside the click system) Code Pablo **EL118288**



HILTI VC 40M-X



Compact universal vacuum cleaner with automatic filter cleaning for collecting dry and occasionally wet dust - class M

Technical characteristics

Suction class : M

Dust capacity: 34kg

Water capacity: 22.4 liters

Automatic unclogging: Yes

Max depression: 24.5kPa

Vibration value: 2.5 m/s²

Weight: 14.4kg

Delivered with 2 in 1 click and universal suction connectic



Pablo code : EL101070



Vacuum cleaner for wood dust. Not suitable for dust containing silica (concrete, etc.)

Consumables and accessories

- Dust bag for VC 40-MX (Pack of 10 units) Code Pablo **EL101083**
- Filter for dust applications only Code Pablo **EL101084**
- High performance vacuum cleaner filters (wet and dry applications) Code Pablo **EL101081**
- Universal vacuum cleaner filters for dry and wet applications Code Pablo **EL101079**
- 36mm conical adapter Code Pablo **EL118329**
- DGH & DCH-SL adapter (for connection to any machine outside the click system) Code Pablo **EL118288**



MAKITA VC3211MX1



*Device intended for vacuuming dry and wet dust
Automatic filter cleaning during operation*

Technical characteristics

- Suction class:** M
- Dust capacity:** 32 liters
- Water capacity :** 27 liters
- Automatic unclogging:** Yes
- Max depression:** 22kPa
- Vibration value:** 2.5m/s²
- Weight:** 16.9kg
- Suction pipes:** Diameters 38mm and 28mm
- Delivered with adapter diameters** 22mm and 24mm
- Pablo code :** EL008436



Tool weight requiring special measurements



Vacuum cleaner for wood dust. Not suitable for dust containing silica (concrete, etc.)

Consumables and accessories

- Fabric bag for vacuum cleaner VC3211MX1 (5 BAGS) Code Pablo **EN008557**
- Dust filter set M for VC3211M Code Pablo **EL008543**
- Tripod for suction hose Code Pablo **EL010456**
- Adapter diam 22 Code Pablo **EL118454**
- Adapter diam 24 Code Pablo **EL118455**
- Adapter diam 38 Code Pablo **EL118456**



FESTOOL CTH 26E IN CLEANTEC



Safely vacuums hazardous dusts such as mold and asbestos, hazardous wood preservatives, mineral fiber dust, lead, cadmium, nickel, zinc chromate. The vacuum cleaner with a filter separation degree of 99.995% is the specialist for vacuuming carcinogenic and pathogenic dust.

Technical characteristics

Suction class: H

Dust capacity: 24 liters with bag

Max vacuum: 24 kPa

Weight : 13.9kg

Suction connection: Inner diameter 27mm with bayonet, outer diameter 36mm

Pablo code : EL114535

Consumables and accessories

- Suction fitting adapter: **EL126240**
- Remote control CT-F I/M-Set Code Pablo **EL114536**
- Main filter HF-CTH 26/48 Code Pablo **EL117492**
- Safety filter bag FIS-CTH 26/36 Code Pablo **EL117493**
- Cyclonic filter CT CT-VA-20 Code Pablo **EL114537**
- Waste disposal bag ENS-VA-20/10 Code Pablo **EL115490**

HILTI VC 40H-X



Universal vacuum cleaner with automatic filter cleaning for collecting dry and occasionally wet dust

Technical characteristics

Suction class: H

Dust capacity: 34kg

Water capacity: 22.8 l

Max depression: 24.25kPa

Vibration value : 2.5 m/s²

Weight : 14.4kg

Delivered with 2 in 1 click and universal suction connect

Pablo code: EL920033



Consumables and accessories

- Dust bag for VC 40-X (Pack of 10 units) Code Pablo **EL920036**
- Filter H VC 20/40/150 Code Pablo **EL117030**
- 36MM conical adapter code Pablo **EL118329**
- DGH & DCH-SL adapter (for connection to any machine outside the click system) Code Pablo **EL118288**



MAKITA VC3211HX1



*Class H vacuum cleaner
Device intended for vacuuming dry and wet dust*

Technical characteristics

- Suction class:** H
- Dust capacity:** 32 liters
- Water capacity:** 27 liters
- Max depression:** 22kPa
- Vibration value:** 2.5 m/s²
- Weight:** 16.9kg
- Suction pipes:** Diameters 38mm and 28mm
- Delivered with adapter diameters 22mm and 24mm**
- Pablo code :** EL105889



Tool weight requiring special measurements

Consumables and accessories

- Fabric bag for vacuum cleaner VC3211HX1 (5 BAGS) Code Pablo **EN008557**
- Dust filter set H for VC3211H Code Pablo **EL105890**
- Tripod for suction hose Code Pablo **EL010456**
- Adapter diam 22 Code Pablo **EL118454**
- Adapter diam 24 Code Pablo **EL118455**
- Adapter diam 38 Code Pablo **EL118456**



HELP SITES TO CHOOSE

HELP WITH DISTRIMO CHOICE



Distrimo's Power Tool selection help makes it easy to find the right BYCN-referenced tool to carry out most tasks.

→ Link to the site: [Help with portable electric choice](https://distrimo.bouygues-construction.com/ace-accueil)

Recherche par tâche à effectuer



<https://distrimo.bouygues-construction.com/ace-accueil>

HELP SITES TO CHOOSE

THE ZERO PENIBILITY BOX



BOX ZÉRO PÉNIBILITÉ

DISTRIPLUS

BOX 0 PÉNIBILITÉ

compatible avec le référencement électroportatifs **18V**

BRAS

SERIAL DRILLER

PORTIQUE

PERC

LÉGERETÉ **SIMPLICITÉ** **EFFICACITÉ**


Réduire la pénibilité pour une carrière en bonne santé !

Au travers notre box, nous vous proposons une gamme de produits améliorant l'ergonomie et la productivité de certaines tâches nécessitant des électroportatifs sur chantier. Pour les découvrir, c'est juste en-dessous !

léger **simple** **efficace**

Through the box, you will find a variety of products improving the ergonomics and productivity of certain tasks on the construction site.

→ Link to the site: [Box Zero Difficulty](https://distrimo.bouygues-construction.com/aides-ergonomics-et-de-productivite)

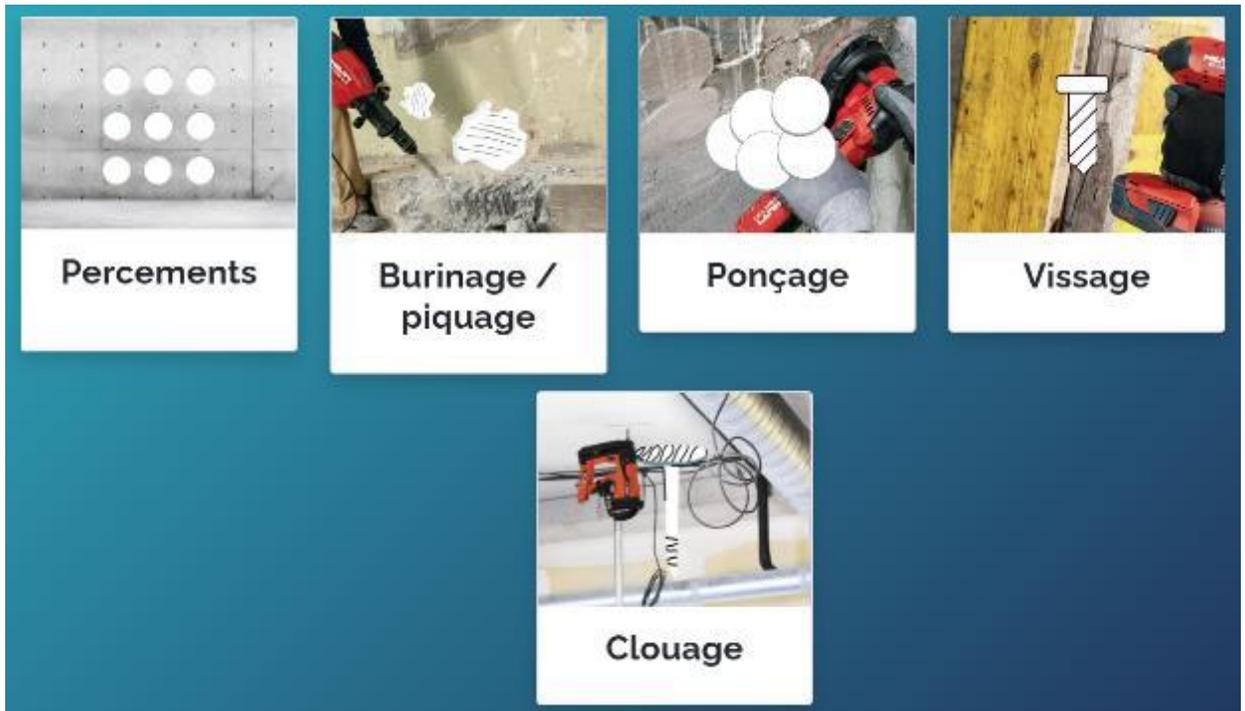

Percements

Burinage / piquage

Ponçage

Vissage

Clouage

<https://distrimo.bouygues-construction.com/aides-ergonomics-et-de-productivite>

